

TRANSPORTATION ANALYSIS

US 19 and Spring Hill Drive - NEC

Prepared for:

Meridien Development LLC



Palm Traffic
Engineering + Planning

*Submitted by George Andelidas@TBC
Provided by applicant w/ application*

Transportation Analysis


US 19 and Spring Hill Drive - NEC

December 2024

Prepared for:
Meridien Development LLC

Prepared by:
Palm Traffic
4006 South MacDill Avenue
Tampa, FL 33611
Ph: (813) 296-2595

Project No. T24091

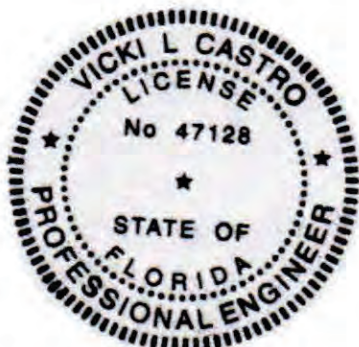

Vicki L
Castro

Digitally signed
by Vicki L Castro
Date: 2024.12.23
16:58:49 -05'00'

Vicki L. Castro, P.E.
P.E. No. 47128

This item has been digitally signed and sealed by Vicki L. Castro on the date adjacent to the seal.

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

TABLE OF CONTENTS

Introduction	1
Project Description	1
Estimated Daily Project Traffic	3
Estimated AM Project Traffic	3
Estimated PM Project Traffic	3
Project Trip Distribution/Assignment	7
Budgeted Improvements	7
Study Area	11
Adjacent Roadways	11
Buildout	11
Background Traffic	13
Intersection Analysis	19
Access Analysis	21
Generalized Link Analysis	23

LIST OF FIGURES

Figure 1. Project Location	2
Figure 2. Project Traffic – AM Peak Hour	9
Figure 3. Project Traffic – PM Peak Hour	10
Figure 4. Existing Traffic	14
Figure 5. Peak Season Traffic	15
Figure 6. Background Traffic	16
Figure 7. Background Plus Project Traffic – AM Peak Hour	17
Figure 8. Background Plus Project Traffic – PM Peak Hour	18

LIST OF TABLES

Table 1. Estimated Daily Project Traffic	4
Table 2. AM Peak Hour Project Traffic	5
Table 3. PM Peak Hour Project Traffic	6
Table 4. Estimated New Peak Hour Project Traffic Distribution	8
Table 5. Study Area Determination	12
Table 6. Estimated Intersection Volume to Capacity	20
Table 7. Access Recommendations	22
Table 8. Generalized Link Analysis	24

LIST OF APPENDICES

Conceptual Site Plan
Trip Generation
ITE Passerby Rates
Turning Movement Counts
FDOT Seasonal Adjustment Factors
FDOT Historical Counts
Signal Timings
Intersection Analysis
Turn Lane Warrants
FDOT Design Manual 212-1
FDOT Generalized Service Volume Tables

INTRODUCTION

The purpose of this report is to provide the Transportation Analysis for the proposed development of the property located east of US 19 and north of Spring Hill Drive in Hernando County, Florida, as shown in Figure 1.

PROJECT DESCRIPTION

The property is currently vacant. The proposed project will consist of the following uses:


- 3 bay Quick Lube
- 3,000 square foot Coffee Shop with drive-through
- 5,500 square foot Fast Food Restaurant with Drive-Through
- 3,600 square foot Fast Food Restaurant with Drive-Through
- 3,500 square foot Medical Office.

The accesses for the project are proposed to be as follows.

- One (1) right-in/right-out access to US 19
- One (1) left-in/left-out/right-in/right-out access to US 19
- One (1) left-in/right-in/right-out access to Pinehurst Drive.

A conceptual site plan is included in the Appendix of this report.

Figure 1. Project Location

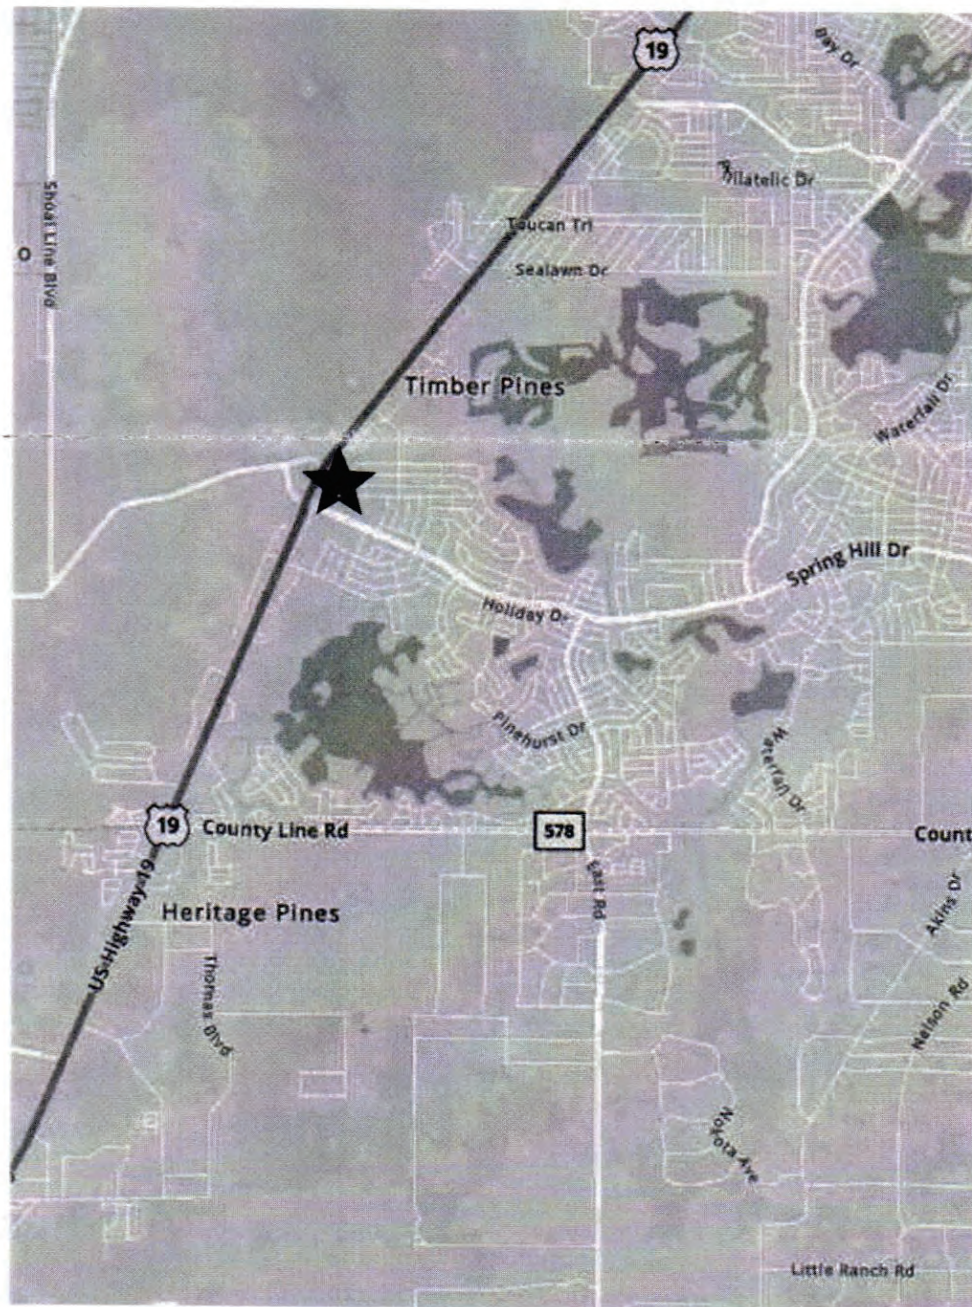

ESTIMATED DAILY PROJECT TRAFFIC

The trip rates utilized in this report were obtained from the latest computerized version of OTISS which utilizes the Institute of Transportation Engineers (ITE) Trip Generation, 11th Edition, 2021, as its database. Based on these trip rates, it is estimated that the proposed project will attract approximately 6,101 daily trip ends, as shown in Table 1.

Studies contained in the ITE Trip Generation, 11th Edition, indicate that a percentage of the project trips already exist on the adjacent roadways - passerby capture. Therefore, the new daily trip ends attracted to the proposed project would be 3,172 trip ends, as shown in Table 1.

ESTIMATED AM PROJECT TRAFFIC

Again, based on data contained in the ITE Trip Generation, 11th Edition, the proposed project would attract approximately 685 trip ends during the AM peak hour with 354 inbound and 331 outbound, as shown in Table 2.

As previously stated, studies contained in the ITE Trip Generation, 11th Edition, indicate that a percentage of the project trips already exist on the adjacent roadways - passerby capture. Therefore, the new AM peak hour trip ends attracted to the proposed project would be 352 trip ends with 184 inbound and 168 outbound, as shown in Table 2.

ESTIMATED PM PROJECT TRAFFIC

Again, based on data contained in the ITE Trip Generation, 11th Edition, the proposed project would attract approximately 444 trip ends during the PM peak hour with 227 inbound and 217 outbound, as shown in Table 3.

As previously stated, studies contained in the ITE Trip Generation, 11th Edition, indicate that a percentage of the projects trips already exist on the adjacent roadways - passerby capture. Therefore, the new PM peak hour trip ends attracted to the proposed project would be 215 trip ends with 109 inbound and 106 outbound, as shown in Table 3.

Table 1. Estimated Daily Project Traffic

<u>Land Use</u>	ITE <u>LUC</u>	<u>Size</u>	Daily <u>Trip Ends (1)</u>	Passerby <u>Capture (1)</u>	New Daily <u>Trip Ends</u>
Quick Lube	941	3 Bays	120	0	120
Coffee Shop w/ DT	937	3,000 SF	1,601	801	800
Fast Food Restaurant w DT	934	5,500 SF	2,571	1,286	1,285
Fast Food Restaurant w DT	934	3,600 SF	1,683	842	841
Medical Office	720	3,500 SF	<u>126</u>	<u>0</u>	<u>126</u>
Total			6,101	2,929	3,172

(1) Source: ITE Trip Generation, 11th Edition, 2021.

Table 2. AM Peak Hour Project Traffic

<u>Land Use</u>	ITE <u>LUC</u>	<u>Size</u>	AM Peak Hour Trip Ends (1)			Passerby Capture (1)			New AM Peak Hour Trip Ends		
			<u>In</u>	<u>Out</u>	<u>Total</u>	<u>In</u>	<u>Out</u>	<u>Total</u>	<u>In</u>	<u>Out</u>	<u>Total</u>
Quick Lube	941	3 Bays	6	3	9	0	0	0	6	3	9
Coffee Shop w/ DT	937	3,000 SF	132	126	258	66	63	129	66	63	129
Fast Food Restaurant w DT	934	5,500 SF	125	120	245	63	60	123	62	60	122
Fast Food Restaurant w DT	934	3,600 SF	82	79	161	41	40	81	41	39	80
Medical Office	720	3,500 SF	<u>9</u>	<u>3</u>	<u>12</u>	<u>0</u>	<u>0</u>	<u>0</u>	<u>9</u>	<u>3</u>	<u>12</u>
Total			354	331	685	170	163	333	184	168	352

(1) Source: ITE Trip Generation, 11th Edition, 2021.

Table 3. PM Peak Hour Project Traffic

<u>Land Use</u>	<u>ITE LUC</u>	<u>Size</u>	<u>PM Peak Hour Trip Ends (1)</u>			<u>Passerby Capture (1)</u>			<u>New PM Peak Hour Trip Ends</u>		
			<u>In</u>	<u>Out</u>	<u>Total</u>	<u>In</u>	<u>Out</u>	<u>Total</u>	<u>In</u>	<u>Out</u>	<u>Total</u>
Quick Lube	941	3 Bays	8	7	15	0	0	0	8	7	15
Coffee Shop w/ DT	937	3,000 SF	59	58	117	32	32	64	27	26	53
Fast Food Restaurant w DT	934	5,500 SF	95	87	182	52	48	100	43	39	82
Fast Food Restaurant w DT	934	3,600 SF	62	57	119	34	31	65	28	26	54
Medical Office	720	3,500 SF	3	8	11	0	0	0	3	8	11
Total			227	217	444	118	111	229	109	106	215

(1) Source: ITE Trip Generation, 11th Edition, 2021.

PROJECT TRIP DISTRIBUTION/ASSIGNMENT

The following distribution of the new AM and PM peak hour trip ends was based on the existing traffic and development patterns with hand assignment to the local network:

- 25% to and from the north (via US 19)
- 25% to and from the south (via US 19)
- 40% to and from the east (via Spring Hill Drive)
- 10% to and from the west (via Osowaw Boulevard).

Table 4 shows the distribution of the new AM and PM peak hour project trip ends. Figure 2 and Figure 3 illustrate the AM and PM peak hour trip ends, respectively.

BUDGETED IMPROVEMENTS

According to the FDOT Work Program and the Hernando County Capital Improvement Program, there are no capacity adding projects budgeted within the vicinity of the project.

Table 4. Estimated New Peak Hour Project Traffic Distribution

Time Period	North (25%)		South (25%)		East (40%)		West (10%)		Total	
	<u>In</u>	<u>Out</u>	<u>In</u>	<u>Out</u>	<u>In</u>	<u>Out</u>	<u>In</u>	<u>Out</u>	<u>In</u>	<u>Out</u>
AM	46	42	46	42	74	67	18	17	184	168
PM	27	26	27	27	44	42	11	11	109	106

Figure 2. Project Traffic – AM Peak Hour


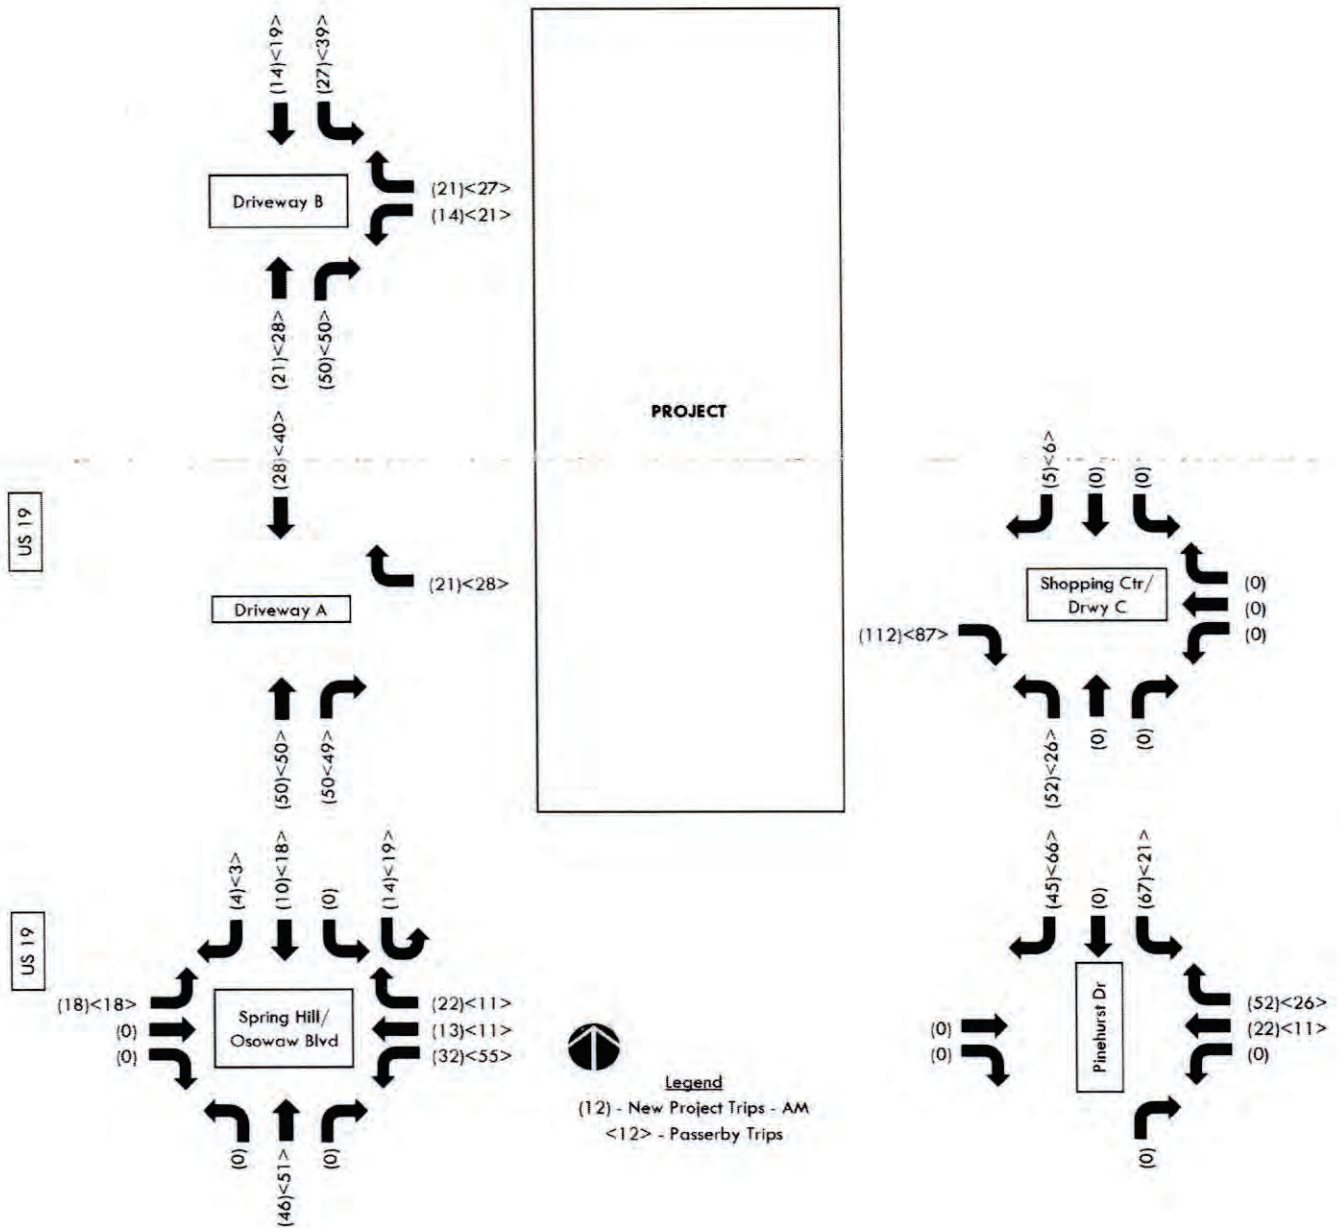


Figure 3. Project Traffic – PM Peak Hour

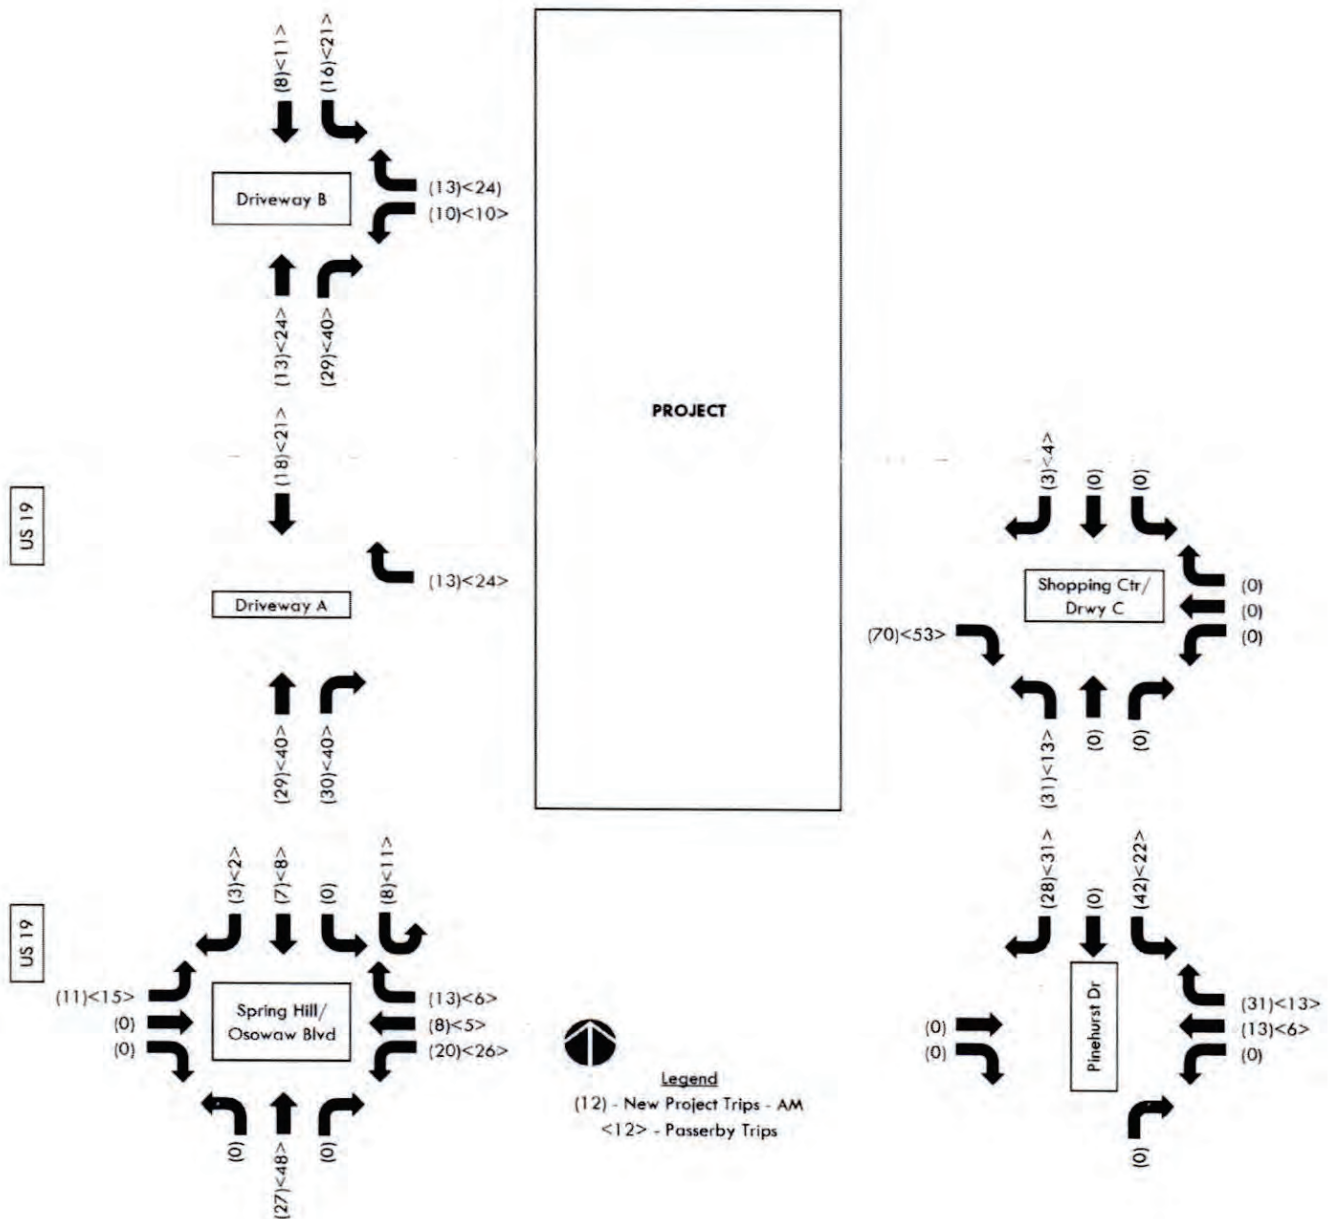

STUDY AREA

The study area for this analysis was determined to include all major road network facilities in which the peak hour project traffic consumes 4.5 percent or more of the adopted level of service capacity of the roadway. Table 5 shows the Study Area Determination for the project. As shown in the table, the project traffic does not consume more than 4.5 percent of the peak hour capacity on any of the adjacent links. Therefore, only the adjacent links will be included in the study area:

- US 19 from Spring Hill Drive to Trenton Avenue
- Pinehurst Drive from Spring Hill Drive to project.

ADJACENT ROADWAYS

As stated previously, the site is located east of US 19 and north of Spring Hill Drive. US 19 is a six-lane divided roadway. Spring Hill Drive is a four (4) lane divided roadway. Pinehurst Drive is a two (2) lane undivided roadway. According to the FDOT Work Program and Hernando County Capital Improvement Plan, there are no other programmed capacity improvements in the vicinity of the project.

BUILDOUT

It is anticipated the project will have a 2026 buildout date.

Table 5. Study Area Determination

<u>Roadway</u>	<u>From</u>	<u>To</u>	<u>Lanes</u>	<u>Peak Hour Two-Way Capacity (1)</u>	<u>Percent Project Traffic</u>	<u>New PM</u>	
						<u>Peak Hour Project Traffic</u>	<u>Percent Consumed</u>
US 19	Applegate Dr	Spring Hill Dr	6LD	5,390	25%	54	1.0%
	Spring Hill Dr	Trenton Ave	6LD	5,390	25%	54	1.0%
Spring Hill Dr	Kenlake Ave	US 19	4LD	3,222	40%	86	2.7%
Osowaw Blvd	US 19	Tarpon Blvd	2LU	1,197	10%	22	1.8%

(1) Source: FDOT Generalized Level of Service Tables.

Local 4LD: $3,580 \times 0.90 = 3,222$

Local 2LU: $1,330 \times 0.90 = 1,197$

BACKGROUND TRAFFIC

The following methodology was utilized to estimate the existing volumes within the study area:

1. PALM TRAFFIC conducted AM (7:00 – 9:00) and PM (4:00 – 6:00) peak hour turning movement counts on Thursday, November 14, 2024, at the following intersections:
 - US 19 and Spring Hill Drive/Osowaw Boulevard
 - US 19 and Tarpon Boulevard
 - Spring Hill Drive and Pinehurst Drive
 - Pinehurst Drive and Shopping Center.

Figure 4 illustrates the existing traffic for the AM and PM peak hours.

2. The turning movement counts were adjusted to the peak season based on the FDOT Peak Season Adjustment Factors for Hernando County of 1.03. Figure 5 illustrates the peak season traffic for the AM and PM peak hours.
3. Based on FDOT historical traffic counts on US 19 in the area, there has been little to no growth over the past 10 years. To be conservative, an annual growth rate of 1.0 percent per year was used to determine the background traffic in the buildout year of 2026. Figure 6 illustrates the background traffic. Figure 7 and Figure 8 illustrate the AM and PM background plus project traffic, respectively.

Figure 4. Existing Traffic

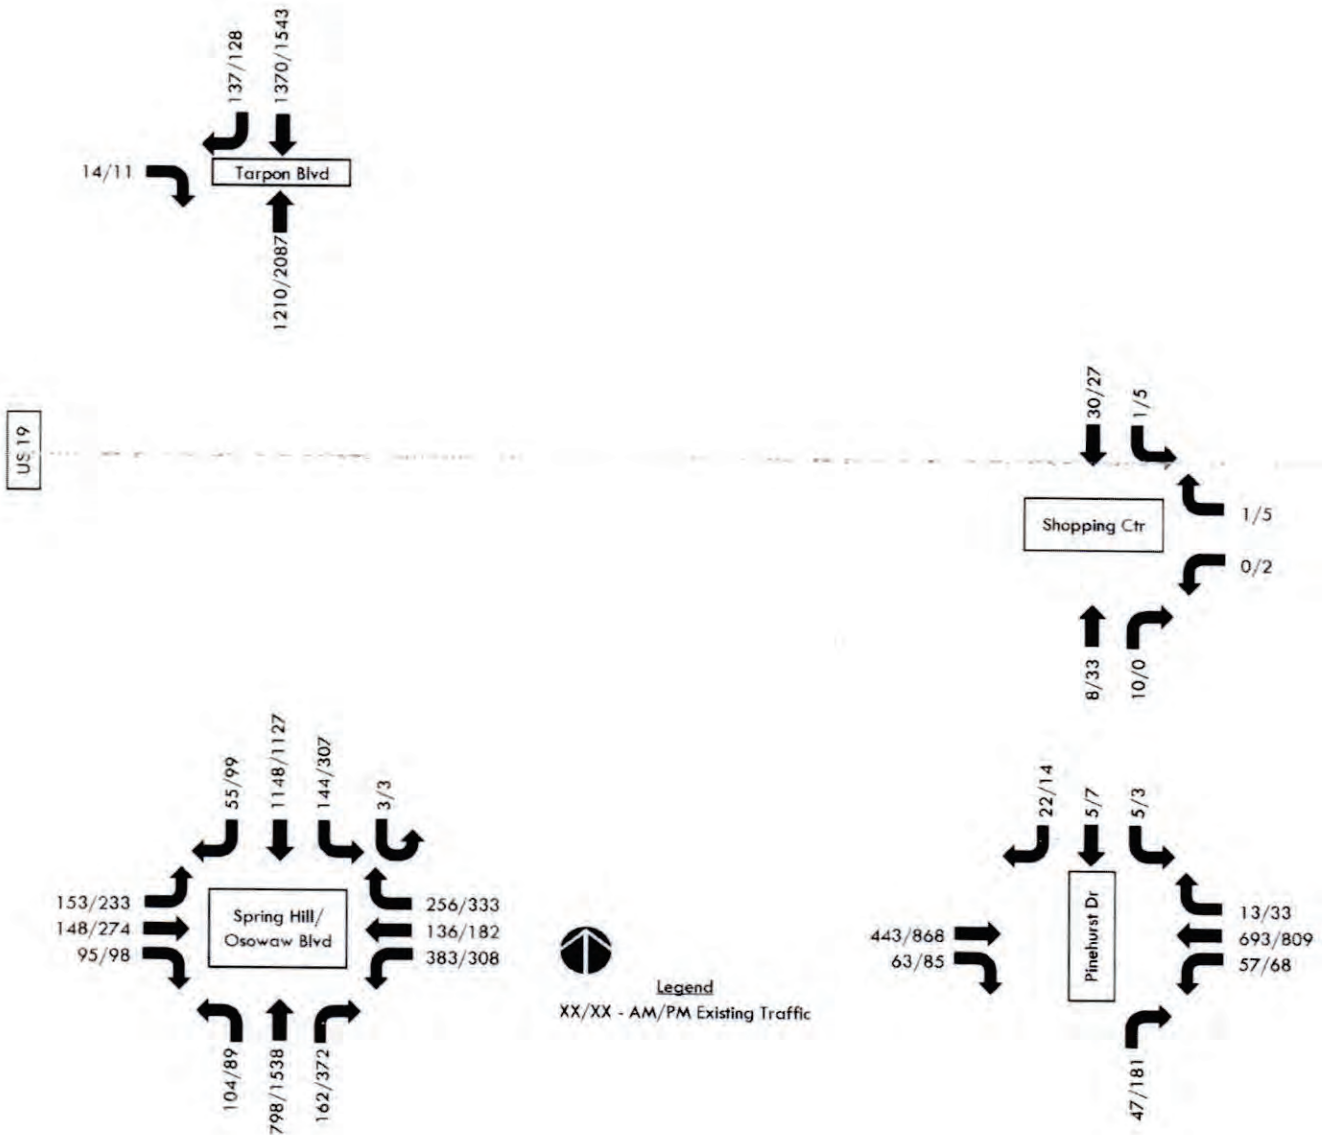


Figure 5. Peak Season Traffic

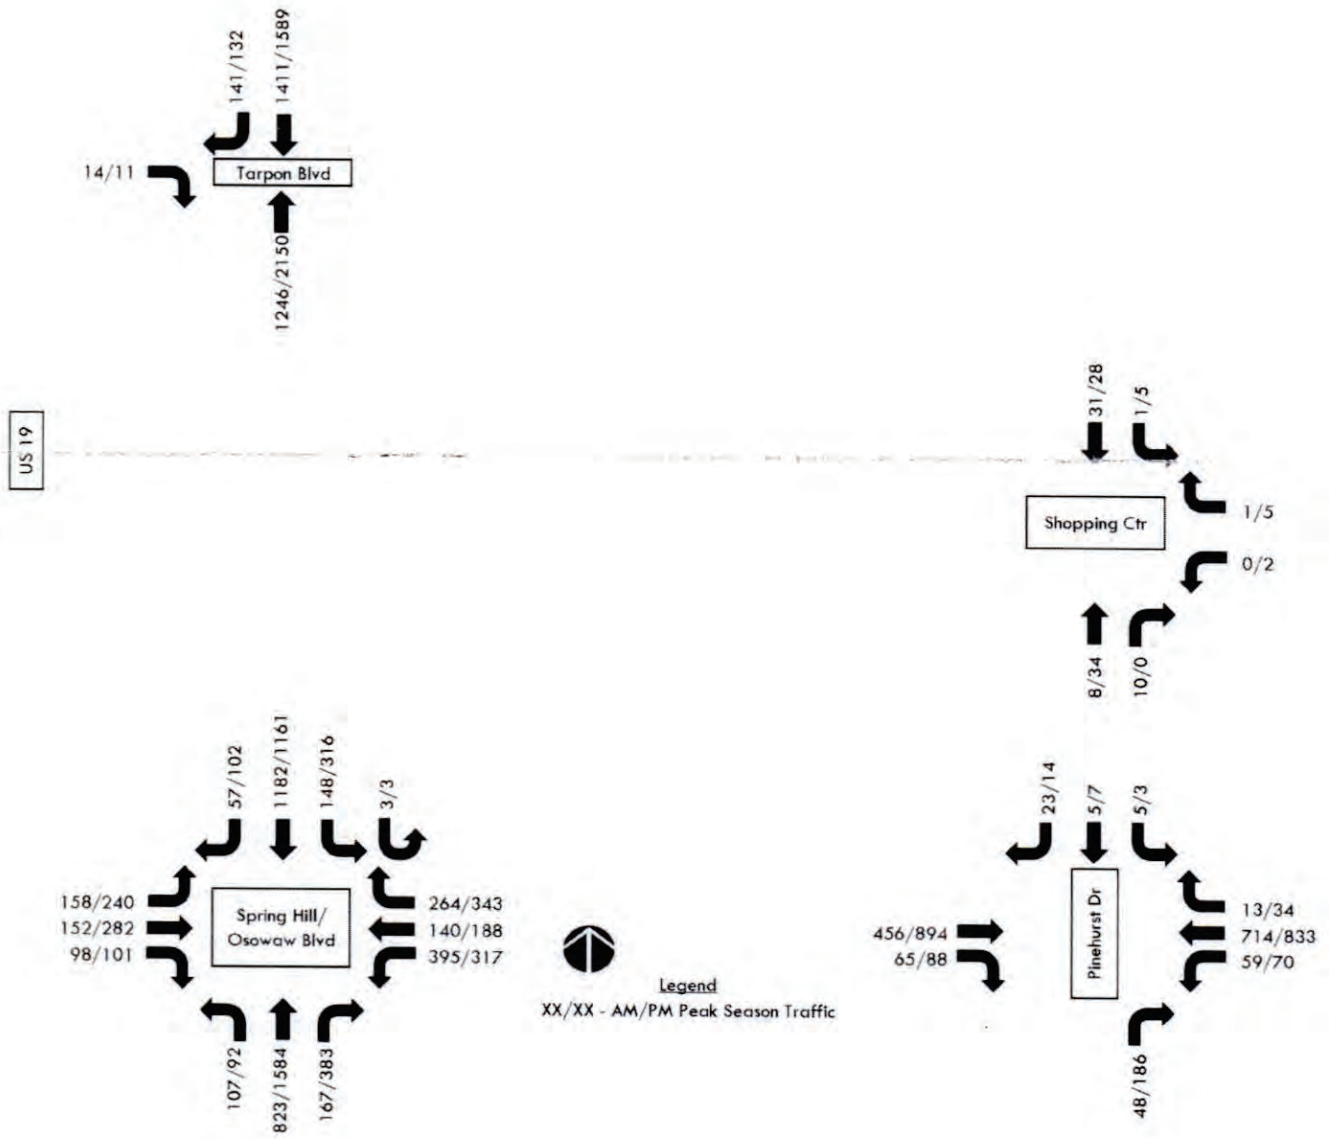


Figure 6. Background Traffic

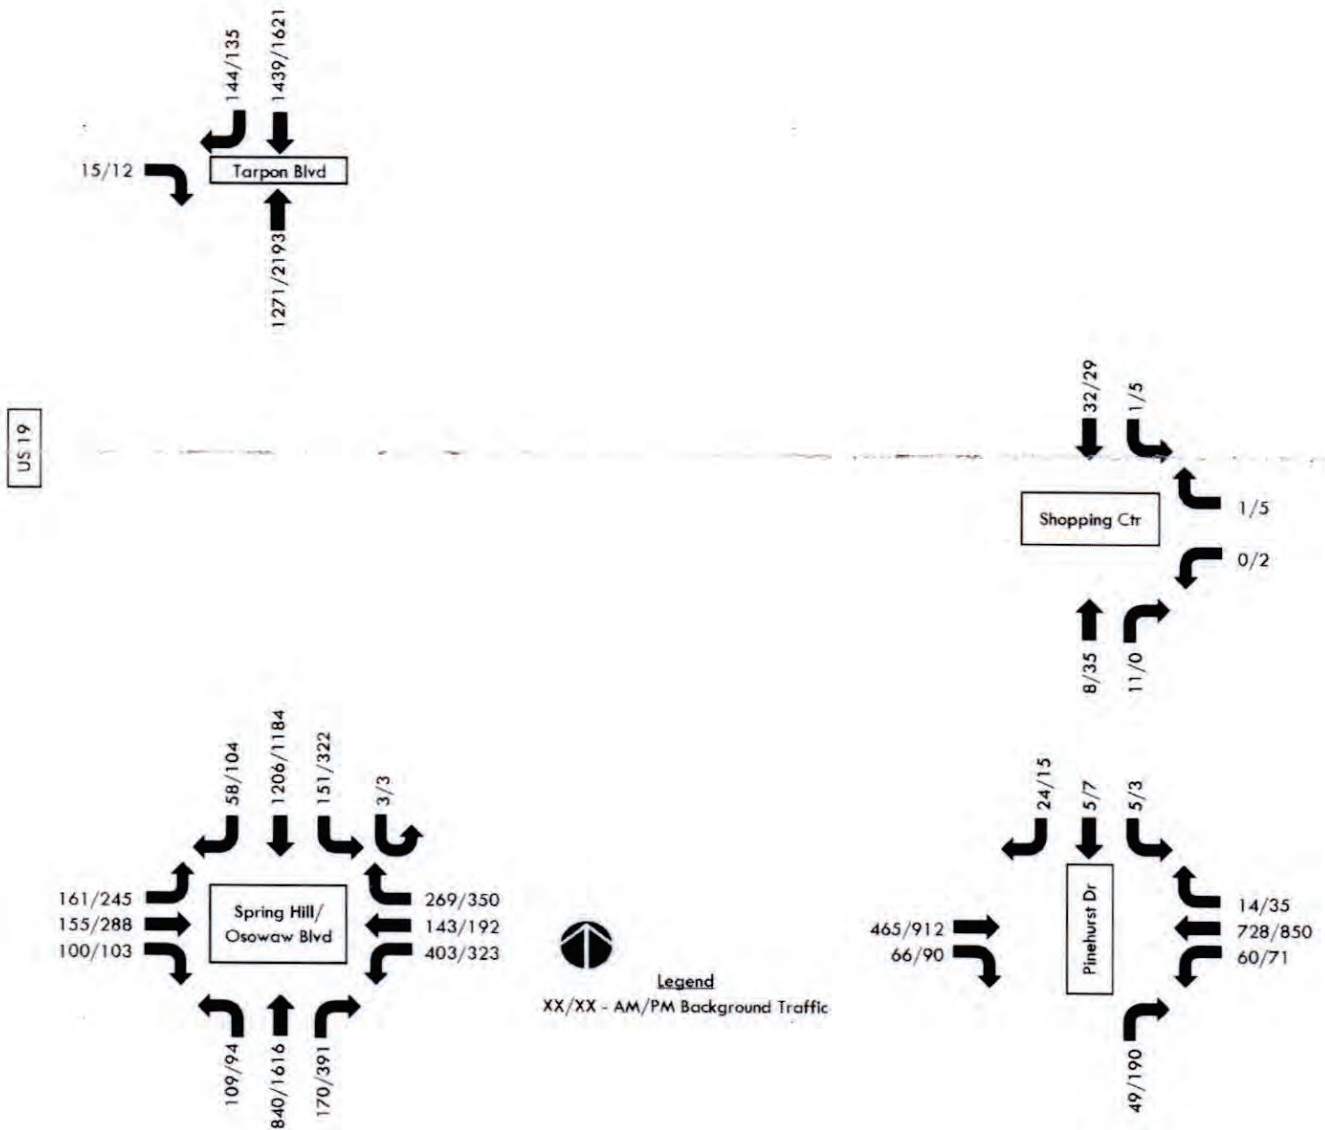


Figure 7. Background Plus Project Traffic – AM Peak Hour


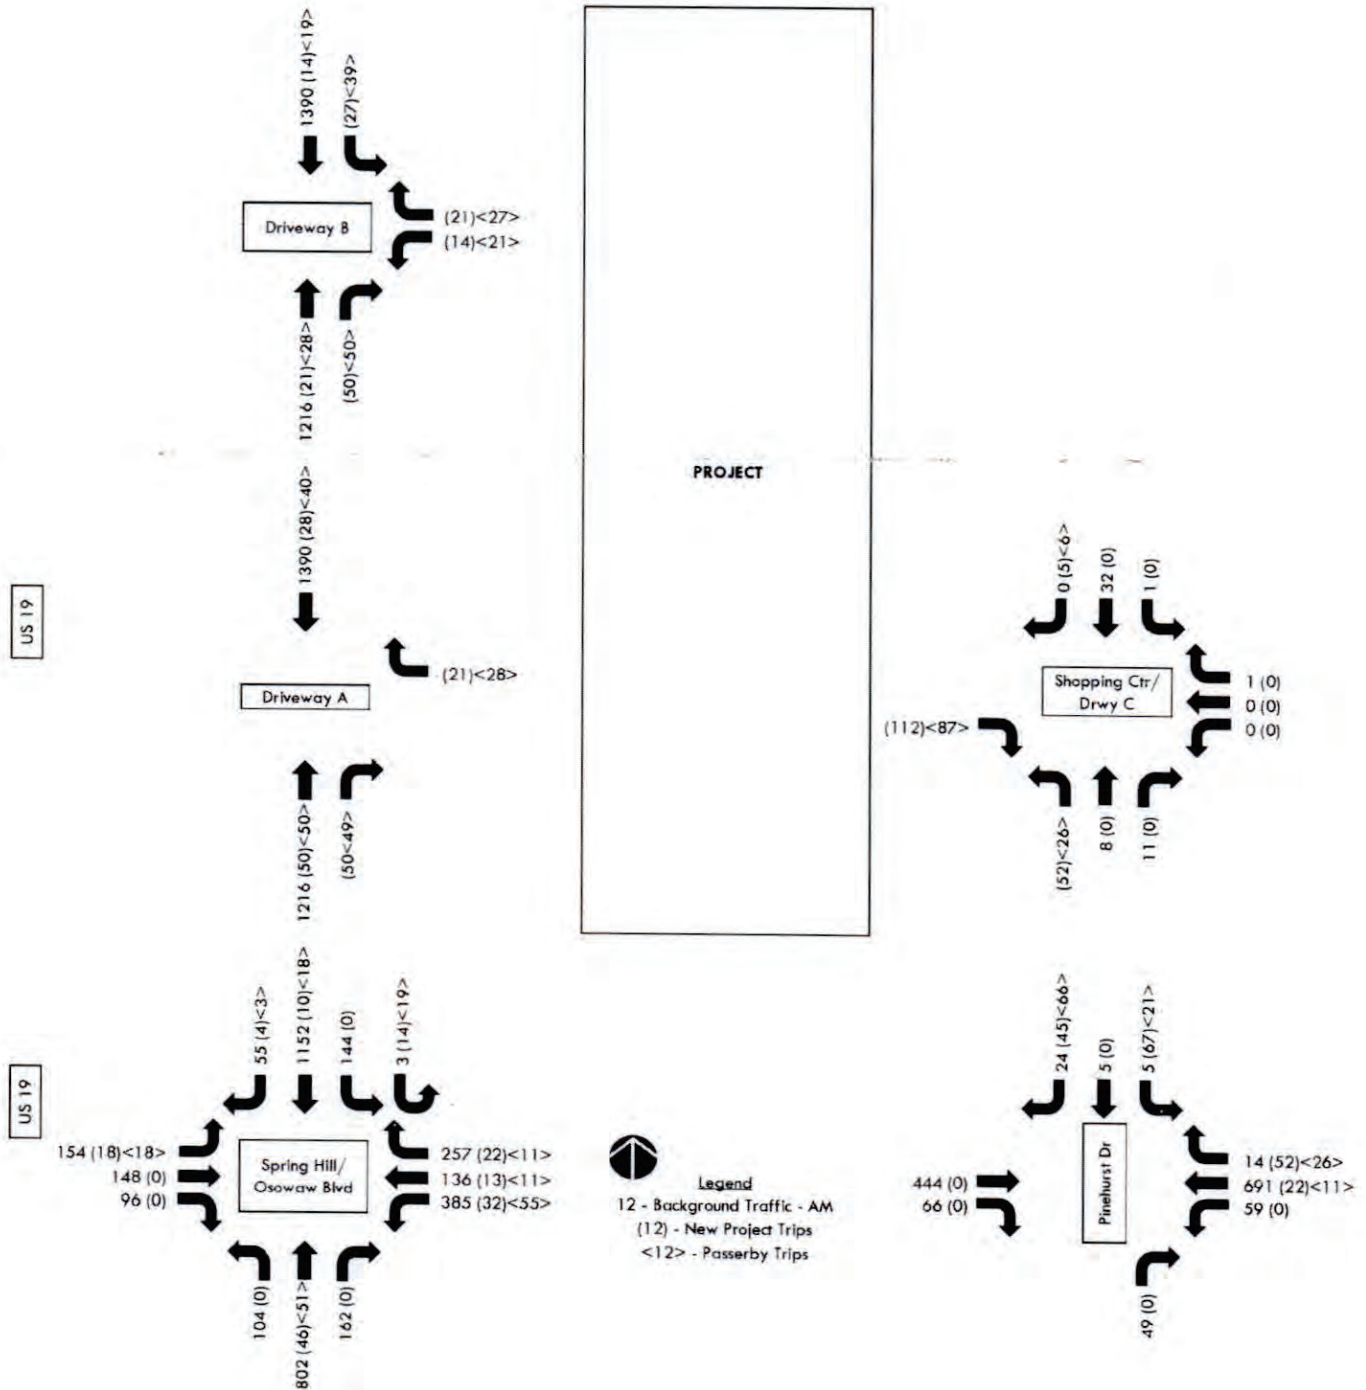


Figure 8. Background Plus Project Traffic – PM Peak Hour

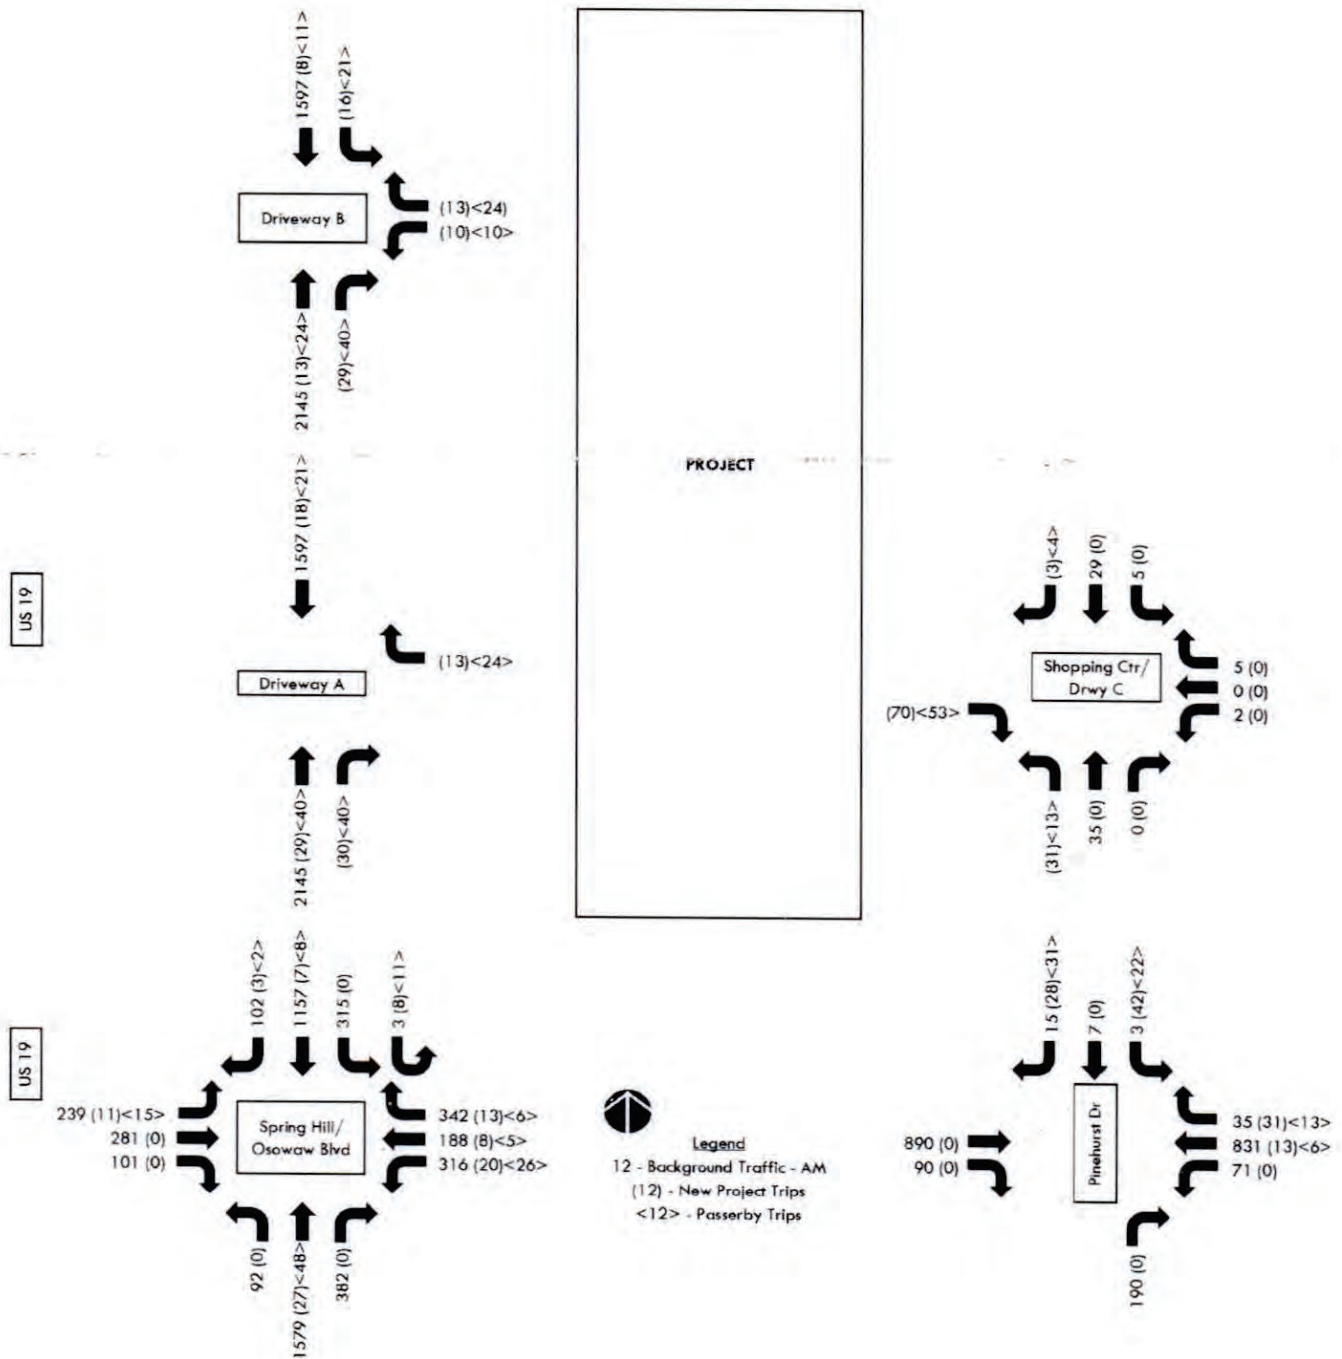

INTERSECTION ANALYSIS

Intersection analysis was conducted for the AM and PM peak hours at the following intersections:

- US 19 and Osowaw Boulevard/Spring Hill Drive
- US 19 and Driveway B
- Spring Hill Drive and Pinehurst Drive
- Pinehurst Drive and Shopping Center/Driveway C.

The analysis was based on SYNCHRO with the proposed project traffic. Table 6 summarize the signalized intersection analysis results. The results are also described in the following paragraphs:

US 19 and Osowaw Boulevard/Spring Hill Drive

Signalized intersection analysis indicates that all the individual movements should operate with a volume to capacity (v/c) ratio less than 1.0 during the AM and PM peak hours with background plus project traffic.

US 19 and Driveway B

The intersection is unsignalized. Unsignalized intersection analysis indicates that all movements should operate with a v/c ratio less than 1.0 during the background plus project traffic during the AM and PM peak hours.

Spring Hill Drive and Pinehurst Drive

The intersection is unsignalized. Unsignalized intersection analysis indicates that all the individual movements should operate with a v/c ratio less than 1.0 during the AM and PM peak hours with background plus project traffic.

Pinehurst Drive and Shopping Center/Driveway C

The intersection is unsignalized. Unsignalized intersection analysis indicates that all the individual movements should operate with a v/c ratio less than 1.0 during the AM and PM peak hours with background plus project traffic.

Table 6. Estimated Intersection Volume to Capacity

<u>Intersection</u>	<u>Movement</u>	AM Peak Hour Traffic Background Plus Project Traffic			PM Peak Hour Traffic Background Plus Project Traffic		
		<u>Left</u>	<u>Through</u>	<u>Right</u>	<u>Left</u>	<u>Through</u>	<u>Right</u>
US 19 and Spring Hill Drive	EB	0.59	0.46	0.30	0.74	0.66	0.31
	WB	0.85	0.57	0.66	0.83	0.76	0.99
	NB	0.68	0.52	0.25	0.73	0.92	0.48
	SB	0.55	0.67	0.09	0.78	0.58	0.15
US 19 and Driveway B	WB	0.20	-	0.15	0.62	-	0.24
	NB	-	*	*	-	*	*
	SB	0.29	*	-	0.48	*	*
Spring Hill Drive and Pinehurst Drive	EB	-	*	*	-	*	*
	WB	0.06	*	*	0.12	*	*
	NB	-	-	0.07	-	-	0.42
	SB	0.64	0.64	0.64	0.67	0.67	0.67
Pinehurst Drive and Driveway C	EB	-	-	0.21	-	-	0.13
	WB	0.00	0.00	0.00	0.01	0.01	0.01
	NB	0.05	*	*	0.03	*	*
	SB	0.00	*	*	0.00	*	*

* Free flow

ACCESS ANALYSIS

The recommendations included in this report are based on a field review of the site, the proposed site plan and the Transportation Analysis. The methodology utilized to determine the need for a right and left turn lanes was based on the FDOT Multimodal Access Management Guidebook 2023. The access recommendations are summarized in Table 7 and described in the following paragraph:

US 19 and Driveway A

The proposed project driveway has right-in/right-out access to US 19. Based on the estimated traffic, a northbound right turn lane is warranted. Based on FDOT Design Manual 212-1, the design speed and the background plus project traffic, the turn lane should be 405 feet, which includes a 50-foot taper.

US 19 and Driveway B

This intersection has left-in/left-out/right-in/right-out access to US 19. Based on the estimated project traffic, a northbound right turn lane and a southbound left turn lane are warranted. Based on FDOT Design Manual 212-1, the design speed and the background plus project traffic, the northbound right turn lane should be 405 feet and the southbound left turn lane should be 455 feet. Both include a 50-foot taper.

Pinehurst Drive and Driveway C

The proposed project driveway will have left-in/right-in/right-out access to Pinehurst Drive. Based on the estimated project traffic, a northbound left turn lane and a southbound right turn lane are not warranted.

Table 7. Access Recommendations

<u>Intersection</u>	<u>Movement</u>	<u>Peak Hour Volume (1)</u>	<u>Turn Lane Warranted?</u>	<u>Queue Storage (2)</u>	<u>Deceleration Length (3)</u>	<u>Required Length</u>
US 19 and Driveway A	NBR	99/70	Y	0'	405'	405'
US 19 and Driveway B	NBR	100/69	Y	0'	405'	405'
	SBL	66/37	Y	50'	405'	455'
Pinehurst Drive and Driveway C	NBL	78/44	N			
	SBR	11/7	N			

(1) See Figures 7 and 8, Background Plus Project Traffic, from the report.

(2) Based on Synchro 95th percentile queue or a minimum of 50 feet for left turn lanes.

(3) Based on FDOT Design Manual 212-1 and a design speed of 60 mph on US 19.

GENERALIZED LINK ANALYSIS

A generalized link analysis was conducted for those roadways within the area of influence for the following traffic conditions:

- Peak Season Traffic
- Background Traffic
- Background Plus Project Traffic

Table 8 presents the results of the analysis for the general link analysis. According to the results shown in the table, there currently is excess capacity along US 19 and Pinehurst Drive during the peak season and background conditions. With the project traffic added to the background traffic, it is estimated that the roadway segments within the vicinity of the project would continue to operate at an acceptable level of service.

Table 8. Generalized Link Analysis

<u>Roadway</u>	<u>From</u>	<u>To</u>	<u>LOS</u> <u>Standard</u>	<u>Lanes</u>	<u>Peak Hour</u> <u>Capacity (1)</u>	<u>Peak</u> <u>Season</u> <u>Traffic (2)</u>	<u>Background</u> <u>Traffic (3)</u>	<u>Project</u> <u>Traffic (4)</u>	<u>Background</u> <u>Plus Project</u> <u>Traffic</u>	<u>Available</u> <u>Capacity</u>
US 19	Spring Hill Dr	Project	D	6LD	4,870	3,749	3,824	77	3,901	969
	Project	Trenton Ave	D	6LD	4,870	3,871	3,949	60	4,009	861
Pinehurst Dr	Spring Hill Dr	Project	D	2LU	1,755	64	66	104	170	1,585

(1) Source: FDOT Generalized Service Volume Tables.

(2) See Figure 5, Peak Season Traffic, of this report.

(2) See Figure 6, Background Traffic, of this report.

(3) See Figure 2, Project Traffic, of this report.

(4) See Figure 8, Background Plus Project Traffic, of this report.

APPENDIX

APPENDIX
CONCEPTUAL SITE PLAN



APPENDIX

TRIP GENERATION

PERIOD SETTING

Analysis Name : Daily
Project Name : US 19 and Spring Hill Dr - 2024
Date: 11/27/2024
State/Province:
Country:
Analyst's Name:

No :
City:
Zip/Postal Code:
Client Name:
Edition: Trip Generation Manual, 11th Ed

Land Use	Independent Variable	Size	Time Period	Method	Entry	Exit	Total
941 - Quick Lubrication Vehicle Shop (General Urban/Suburban)	Servicing Positions	3 ⁽⁰⁾	Weekday	Average 40	60 ⁽¹⁾ 50%	60 ⁽¹⁾ 50%	120 ⁽¹⁾
937 - Coffee/Donut Shop with Drive-Through Window (General Urban/Suburban)	1000 Sq. Ft. GFA	3 ⁽⁰⁾	Weekday	Average 533.57	801 50%	800 50%	1601
934 - Fast-Food Restaurant with Drive-Through Window (General Urban/Suburban)	1000 Sq. Ft. GFA	5.5	Weekday	Average 467.48	1286 50%	1285 50%	2571
934 - Fast-Food Restaurant with Drive-Through Window - 1 (General Urban/Suburban)	1000 Sq. Ft. GFA	3.6	Weekday	Average 467.48	842 50%	841 50%	1683
720 - Medical-Dental Office Building - Stand-Alone (General Urban/Suburban)	1000 Sq. Ft. GFA	3.5	Weekday	Average 36	63 50%	63 50%	126

(0) indicates size out of range.

(1) indicates small sample size, use carefully.

TRAFFIC REDUCTIONS

Land Use	Entry Reduction	Adjusted Entry	Exit Reduction	Adjusted Exit
941 - Quick Lubrication Vehicle Shop	0 %	60	0 %	60
937 - Coffee/Donut Shop with Drive-Through Window	0 %	801	0 %	800
934 - Fast-Food Restaurant with Drive-Through Window	0 %	1286	0 %	1285
934 - Fast-Food Restaurant with Drive-Through Window - 1	0 %	842	0 %	841
720 - Medical-Dental Office Building	0 %	63	0 %	63

INTERNAL TRIPS

941 - Quick Lubrication Vehicle Shop

Exit 60 Demand Exit: 0 % (0)

Entry 60 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

937 - Coffee/Donut Shop with Drive-Through Window

Demand Entry: 0 % (0)

Demand Exit: 0 % (0)

Entry 801

Exit 800

941 - Quick Lubrication Vehicle Shop

Exit 60 Demand Exit: 0 % (0)

Entry 60 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window

Demand Entry: 0 % (0)

Demand Exit: 0 % (0)

Entry 1286

Exit 1285

941 - Quick Lubrication Vehicle Shop

Exit 60 Demand Exit: 0 % (0)

Entry 60 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window - 1

Demand Entry: 0 % (0)

Demand Exit: 0 % (0)

Entry 842

Exit 841

941 - Quick Lubrication Vehicle Shop

Exit 60 Demand Exit: 0 % (0)

Entry 60 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

720 - Medical-Dental Office Building

Demand Entry: 0 % (0)

Demand Exit: 0 % (0)

Entry 63

Exit 63

937 - Coffee/Donut Shop with Drive-Through Window

Exit 800 Demand Exit: 0 % (0)

Entry 801 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window

Demand Entry: 0 % (0)

Demand Exit: 0 % (0)

Entry 1286

Exit 1285

937 - Coffee/Donut Shop with Drive-Through Window

Exit 800 Demand Exit: 0 % (0)

Entry 801 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window - 1

Demand Entry: 0 % (0)

Demand Exit: 0 % (0)

Entry 842

Exit 841

937 - Coffee/Donut Shop with Drive-Through Window

Exit 800 Demand Exit: 0 % (0)

Entry 801 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

720 - Medical-Dental Office Building

Demand Entry: 0 % (0)

Demand Exit: 0 % (0)

Entry 63

Exit 63

934 - Fast-Food Restaurant with Drive-Through Window

Exit 1285 Demand Exit: 0 % (0)

Entry 1286 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window - 1

Demand Entry: 0 % (0)

Demand Exit: 0 % (0)

Entry 842

Exit 841

934 - Fast-Food Restaurant with Drive-Through Window

720 - Medical-Dental Office Building

Exit 1285	Demand Exit: 0 % (0)	Balanced: 0	Demand Entry: 0 % (0)	Entry 63
Entry 1286	Demand Entry: 0 % (0)	Balanced: 0	Demand Exit: 0 % (0)	Exit 63

934 - Fast-Food Restaurant with Drive-Through Window - 1

720 - Medical-Dental Office Building

Exit 841	Demand Exit: 0 % (0)	Balanced: 0	Demand Entry: 0 % (0)	Entry 63
Entry 842	Demand Entry: 0 % (0)	Balanced: 0	Demand Exit: 0 % (0)	Exit 63

941 - Quick Lubrication Vehicle Shop

	Total Trips	Internal Trips					External Trips
		937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	720 - Medical-Dental Office Building	Total	
Entry	60 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	60 (100%)
Exit	60 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	60 (100%)
Total	120 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	120 (100%)

937 - Coffee/Donut Shop with Drive-Through Window

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	934 - Fast-Food Restaurant with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	720 - Medical-Dental Office Building	Total	
Entry	801 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	801 (100%)
Exit	800 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	800 (100%)
Total	1601 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	1601 (100%)

934 - Fast-Food Restaurant with Drive-Through Window

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	720 - Medical-Dental Office Building	Total	
Entry	1286 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	1286 (100%)
Exit	1285 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	1285 (100%)
Total	2571 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	2571 (100%)

934 - Fast-Food Restaurant with Drive-Through Window - 1

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window	720 - Medical-Dental Office Building	Total	
Entry	842 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	842 (100%)

Exit	841 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	841 (100%)
Total	1683 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	1683 (100%)

720 - Medical-Dental Office Building

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	Total	
Entry	63 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	63 (100%)
Exit	63 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	63 (100%)
Total	126 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	126 (100%)

EXTERNAL TRIPS

Land Use	External Trips	Pass-by%	Pass-by Trips	Non-pass-by Trips
941 - Quick Lubrication Vehicle Shop	120	0	0	120
937 - Coffee/Donut Shop with Drive-Through Window	1601	50	801	800
934 - Fast-Food Restaurant with Drive-Through Window	2571	50	1286	1285
934 - Fast-Food Restaurant with Drive-Through Window - 1	1683	50	842	841
720 - Medical-Dental Office Building	126	0	0	126

ITE DEVIATION DETAILS

Weekday

Landuse No deviations from ITE.

Methods No deviations from ITE.

Weekday

External Trips 941 - Quick Lubrication Vehicle Shop (General Urban/Suburban)
ITE does not recommend a particular pass-by% for this case.

937 - Coffee/Donut Shop with Drive-Through Window (General Urban/Suburban)
ITE does not recommend a particular pass-by% for this case.

934 - Fast-Food Restaurant with Drive-Through Window (General Urban/Suburban)
ITE does not recommend a particular pass-by% for this case.

934 - Fast-Food Restaurant with Drive-Through Window - 1 (General Urban/Suburban)
ITE does not recommend a particular pass-by% for this case.

720 - Medical-Dental Office Building - Stand-Alone (General Urban/Suburban)
ITE does not recommend a particular pass-by% for this case.

SUMMARY

Total Entering	3052
Total Exiting	3049
Total Entering Reduction	0
Total Exiting Reduction	0
Total Entering Internal Capture Reduction	0
Total Exiting Internal Capture Reduction	0
Total Entering Pass-by Reduction	1464
Total Exiting Pass-by Reduction	1465
Total Entering Non-Pass-by Trips	1588
Total Exiting Non-Pass-by Trips	1584

PERIOD SETTING

Analysis Name : AM Peak Hour
Project Name : US 19 and Spring Hill Dr - 2024
Date: 11/27/2024
State/Province:
Country:
Analyst's Name:
No :
City:
Zip/Postal Code:
Client Name:
Edition: Trip Generation Manual, 11th Ed

Land Use	Independent Variable	Size	Time Period	Method	Entry	Exit	Total
941 - Quick Lubrication Vehicle Shop (General Urban/Suburban)	Servicing Positions	3 ⁽⁰⁾	Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 7 and 9 a.m.	Average 3	6 ⁽¹⁾ 67%	3 ⁽¹⁾ 33%	9 ⁽¹⁾
937 - Coffee/Donut Shop with Drive-Through Window (General Urban/Suburban)	1000 Sq. Ft. GFA	3	Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 7 and 9 a.m.	Average 85.88	132 51%	126 49%	258
934 - Fast-Food Restaurant with Drive-Through Window (General Urban/Suburban)	1000 Sq. Ft. GFA	5.5	Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 7 and 9 a.m.	Average 44.61	125 51%	120 49%	245
934 - Fast-Food Restaurant with Drive-Through Window - 1 (General Urban/Suburban)	1000 Sq. Ft. GFA	3.6	Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 7 and 9 a.m.	Average 44.61	82 51%	79 49%	161
720 - Medical-Dental Office Building - Stand-Alone (General Urban/Suburban)	1000 Sq. Ft. GFA	3.5	Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 7 and 9 a.m.	Best Fit (LOG) $\ln(T) = 0.9\ln(X) + 1.34$	9 75%	3 25%	12

(0) indicates size out of range.

(1) indicates small sample size, use carefully.

TRAFFIC REDUCTIONS

Land Use	Entry Reduction	Adjusted Entry	Exit Reduction	Adjusted Exit
941 - Quick Lubrication Vehicle Shop	0 %	6	0 %	3
937 - Coffee/Donut Shop with Drive-Through Window	0 %	132	0 %	126

Land Use	Entry Reduction	Adjusted Entry	Exit Reduction	Adjusted Exit
934 - Fast-Food Restaurant with Drive-Through Window	0 %	125	0 %	120
934 - Fast-Food Restaurant with Drive-Through Window - 1	0 %	82	0 %	79
720 - Medical-Dental Office Building	0 %	9	0 %	3

INTERNAL TRIPS

941 - Quick Lubrication Vehicle Shop

Exit 3 Demand Exit: 0 % (0)

Entry 6 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

937 - Coffee/Donut Shop with Drive-Through Window

Demand Entry: 0 % (0) Entry 132

Demand Exit: 0 % (0) Exit 126

941 - Quick Lubrication Vehicle Shop

Exit 3 Demand Exit: 0 % (0)

Entry 6 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window

Demand Entry: 0 % (0) Entry 125

Demand Exit: 0 % (0) Exit 120

941 - Quick Lubrication Vehicle Shop

Exit 3 Demand Exit: 0 % (0)

Entry 6 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window - 1

Demand Entry: 0 % (0) Entry 82

Demand Exit: 0 % (0) Exit 79

941 - Quick Lubrication Vehicle Shop

Exit 3 Demand Exit: 0 % (0)

Entry 6 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

720 - Medical-Dental Office Building

Demand Entry: 0 % (0) Entry 9

Demand Exit: 0 % (0) Exit 3

937 - Coffee/Donut Shop with Drive-Through Window

Exit 126 Demand Exit: 0 % (0)

Entry 132 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window

Demand Entry: 0 % (0) Entry 125

Demand Exit: 0 % (0) Exit 120

937 - Coffee/Donut Shop with Drive-Through Window

Exit 126 Demand Exit: 0 % (0)

Entry 132 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window - 1

Demand Entry: 0 % (0) Entry 82

Demand Exit: 0 % (0) Exit 79

937 - Coffee/Donut Shop with Drive-Through Window

Exit 126 Demand Exit: 0 % (0)

Balanced:
0

720 - Medical-Dental Office Building

Demand Entry: 0 % (0) Entry 9

Entry 132 Demand Entry: 0 % (0) Balanced: 0 Demand Exit: 0 % (0) Exit 3

934 - Fast-Food Restaurant with Drive-Through Window

934 - Fast-Food Restaurant with Drive-Through Window - 1

Exit 120 Demand Exit: 0 % (0) Balanced: 0 Demand Entry: 0 % (0) Entry 82

Entry 125 Demand Entry: 0 % (0) Balanced: 0 Demand Exit: 0 % (0) Exit 79

934 - Fast-Food Restaurant with Drive-Through Window

720 - Medical-Dental Office Building

Exit 120 Demand Exit: 0 % (0) Balanced: 0 Demand Entry: 0 % (0) Entry 9

Entry 125 Demand Entry: 0 % (0) Balanced: 0 Demand Exit: 0 % (0) Exit 3

934 - Fast-Food Restaurant with Drive-Through Window - 1

720 - Medical-Dental Office Building

Exit 79 Demand Exit: 0 % (0) Balanced: 0 Demand Entry: 0 % (0) Entry 9

Entry 82 Demand Entry: 0 % (0) Balanced: 0 Demand Exit: 0 % (0) Exit 3

941 - Quick Lubrication Vehicle Shop

	Total Trips	Internal Trips					External Trips
		937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	720 - Medical-Dental Office Building	Total	
Entry	6 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	6 (100%)
Exit	3 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	3 (100%)
Total	9 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	9 (100%)

937 - Coffee/Donut Shop with Drive-Through Window

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	934 - Fast-Food Restaurant with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	720 - Medical-Dental Office Building	Total	
Entry	132 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	132 (100%)
Exit	126 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	126 (100%)
Total	258 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	258 (100%)

934 - Fast-Food Restaurant with Drive-Through Window

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	720 - Medical-Dental Office Building	Total	
Entry	125 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	125 (100%)
Exit	120 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	120 (100%)

Total	245 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	245 (100%)
--------------	------------	--------	--------	--------	--------	--------	------------

934 - Fast-Food Restaurant with Drive-Through Window - 1

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window	720 - Medical-Dental Office Building	Total	
Entry	82 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	82 (100%)
Exit	79 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	79 (100%)
Total	161 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	161 (100%)

720 - Medical-Dental Office Building

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	Total	
Entry	9 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	9 (100%)
Exit	3 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	3 (100%)
Total	12 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	12 (100%)

EXTERNAL TRIPS

Land Use	External Trips	Pass-by%	Pass-by Trips	Non-pass-by Trips
941 - Quick Lubrication Vehicle Shop	9	0	0	9
937 - Coffee/Donut Shop with Drive-Through Window	258	50	129	129
934 - Fast-Food Restaurant with Drive-Through Window	245	50	123	122
934 - Fast-Food Restaurant with Drive-Through Window - 1	161	50	81	80
720 - Medical-Dental Office Building	12	0	0	12

ITE DEVIATION DETAILS

Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 7 and 9 a.m.

Landuse No deviations from ITE.

Methods No deviations from ITE.

External Trips 941 - Quick Lubrication Vehicle Shop (General Urban/Suburban)

Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 7 and 9 a.m.

ITE does not recommend a particular pass-by% for this case.

937 - Coffee/Donut Shop with Drive-Through Window (General Urban/Suburban)

ITE does not recommend a particular pass-by% for this case.

934 - Fast-Food Restaurant with Drive-Through Window (General Urban/Suburban)

ITE does not recommend a particular pass-by% for this case.

934 - Fast-Food Restaurant with Drive-Through Window - 1 (General Urban/Suburban)

ITE does not recommend a particular pass-by% for this case.

720 - Medical-Dental Office Building - Stand-Alone (General Urban/Suburban)

ITE does not recommend a particular pass-by% for this case.

SUMMARY

Total Entering	354
Total Exiting	331
Total Entering Reduction	0
Total Exiting Reduction	0
Total Entering Internal Capture Reduction	0
Total Exiting Internal Capture Reduction	0
Total Entering Pass-by Reduction	169
Total Exiting Pass-by Reduction	164
Total Entering Non-Pass-by Trips	185
Total Exiting Non-Pass-by Trips	167

PERIOD SETTING

Analysis Name :	PM Peak Hour		
Project Name :	US 19 and Spring Hill Dr - 2024	No :	
Date:	11/27/2024	City:	
State/Province:		Zip/Postal Code:	
Country:		Client Name:	
Analyst's Name:		Edition:	Trip Generation Manual, 11th Ed

Land Use	Independent Variable	Size	Time Period	Method	Entry	Exit	Total
941 - Quick Lubrication Vehicle Shop (General Urban/Suburban)	Servicing Positions	3	Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 4 and 6 p.m.	Average 4.85	8 53%	7 47%	15
937 - Coffee/Donut Shop with Drive-Through Window (General Urban/Suburban)	1000 Sq. Ft. GFA	3	Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 4 and 6 p.m.	Average 38.99	59 50%	58 50%	117
934 - Fast-Food Restaurant with Drive-Through Window (General Urban/Suburban)	1000 Sq. Ft. GFA	5.5	Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 4 and 6 p.m.	Average 33.03	95 52%	87 48%	182
934 - Fast-Food Restaurant with Drive-Through Window - 1 (General Urban/Suburban)	1000 Sq. Ft. GFA	3.6	Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 4 and 6 p.m.	Average 33.03	62 52%	57 48%	119
720 - Medical-Dental Office Building - Stand-Alone (General Urban/Suburban)	1000 Sq. Ft. GFA	3.5	Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 4 and 6 p.m.	Best Fit (LIN) $T = 4.07 (X) + -3.17$	3 27%	8 73%	11

TRAFFIC REDUCTIONS

Land Use	Entry Reduction	Adjusted Entry	Exit Reduction	Adjusted Exit
941 - Quick Lubrication Vehicle Shop	0 %	8	0 %	7
937 - Coffee/Donut Shop with Drive-Through Window	0 %	59	0 %	58
934 - Fast-Food Restaurant with Drive-Through Window	0 %	95	0 %	87

Land Use	Entry Reduction	Adjusted Entry	Exit Reduction	Adjusted Exit
934 - Fast-Food Restaurant with Drive-Through Window - 1	0 %	62	0 %	57
720 - Medical-Dental Office Building	0 %	3	0 %	8

INTERNAL TRIPS

941 - Quick Lubrication Vehicle Shop

Exit 7 Demand Exit: 0 % (0)

Entry 8 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

937 - Coffee/Donut Shop with Drive-Through Window

Demand Entry: 0 % (0) Entry 59

Demand Exit: 0 % (0) Exit 58

941 - Quick Lubrication Vehicle Shop

Exit 7 Demand Exit: 0 % (0)

Entry 8 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window

Demand Entry: 0 % (0) Entry 95

Demand Exit: 0 % (0) Exit 87

941 - Quick Lubrication Vehicle Shop

Exit 7 Demand Exit: 0 % (0)

Entry 8 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window - 1

Demand Entry: 0 % (0) Entry 62

Demand Exit: 0 % (0) Exit 57

941 - Quick Lubrication Vehicle Shop

Exit 7 Demand Exit: 0 % (0)

Entry 8 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

720 - Medical-Dental Office Building

Demand Entry: 0 % (0) Entry 3

Demand Exit: 0 % (0) Exit 8

937 - Coffee/Donut Shop with Drive-Through Window

Exit 58 Demand Exit: 0 % (0)

Entry 59 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window

Demand Entry: 0 % (0) Entry 95

Demand Exit: 0 % (0) Exit 87

937 - Coffee/Donut Shop with Drive-Through Window

Exit 58 Demand Exit: 0 % (0)

Entry 59 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

934 - Fast-Food Restaurant with Drive-Through Window - 1

Demand Entry: 0 % (0) Entry 62

Demand Exit: 0 % (0) Exit 57

937 - Coffee/Donut Shop with Drive-Through Window

Exit 58 Demand Exit: 0 % (0)

Entry 59 Demand Entry: 0 % (0)

Balanced:
0

Balanced:
0

720 - Medical-Dental Office Building

Demand Entry: 0 % (0) Entry 3

Demand Exit: 0 % (0) Exit 8

934 - Fast-Food Restaurant with Drive-Through Window

Exit 87 Demand Exit: 0 % (0) Balanced: 0
 Entry 95 Demand Entry: 0 % (0) Balanced: 0

934 - Fast-Food Restaurant with Drive-Through Window - 1

Demand Entry: 0 % (0) Entry 62
 Demand Exit: 0 % (0) Exit 57

934 - Fast-Food Restaurant with Drive-Through Window

Exit 87 Demand Exit: 0 % (0) Balanced: 0
 Entry 95 Demand Entry: 0 % (0) Balanced: 0

720 - Medical-Dental Office Building

Demand Entry: 0 % (0) Entry 3
 Demand Exit: 0 % (0) Exit 8

934 - Fast-Food Restaurant with Drive-Through Window - 1

Exit 57 Demand Exit: 0 % (0) Balanced: 0
 Entry 62 Demand Entry: 0 % (0) Balanced: 0

720 - Medical-Dental Office Building

Demand Entry: 0 % (0) Entry 3
 Demand Exit: 0 % (0) Exit 8

941 - Quick Lubrication Vehicle Shop

	Total Trips	Internal Trips					External Trips
		937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	720 - Medical-Dental Office Building	Total	
Entry	8 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	8 (100%)
Exit	7 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	7 (100%)
Total	15 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	15 (100%)

937 - Coffee/Donut Shop with Drive-Through Window

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	934 - Fast-Food Restaurant with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	720 - Medical-Dental Office Building	Total	
Entry	59 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	59 (100%)
Exit	58 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	58 (100%)
Total	117 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	117 (100%)

934 - Fast-Food Restaurant with Drive-Through Window

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	720 - Medical-Dental Office Building	Total	
Entry	95 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	95 (100%)
Exit	87 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	87 (100%)
Total	182 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	182 (100%)

934 - Fast-Food Restaurant with Drive-Through Window - 1

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window	720 - Medical-Dental Office Building	Total	
Entry	62 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	62 (100%)
Exit	57 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	57 (100%)
Total	119 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	119 (100%)

720 - Medical-Dental Office Building

	Total Trips	Internal Trips					External Trips
		941 - Quick Lubrication Vehicle Shop	937 - Coffee/Donut Shop with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window	934 - Fast-Food Restaurant with Drive-Through Window - 1	Total	
Entry	3 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	3 (100%)
Exit	8 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	8 (100%)
Total	11 (100%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	0 (0%)	11 (100%)

EXTERNAL TRIPS

Land Use	External Trips	Pass-by%	Pass-by Trips	Non-pass-by Trips
941 - Quick Lubrication Vehicle Shop	15	0	0	15
937 - Coffee/Donut Shop with Drive-Through Window	117	55	64	53
934 - Fast-Food Restaurant with Drive-Through Window	182	55	100	82
934 - Fast-Food Restaurant with Drive-Through Window - 1	119	55	65	54
720 - Medical-Dental Office Building	11	0	0	11

ITE DEVIATION DETAILS
Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 4 and 6 p.m.

Landuse No deviations from ITE.

Methods No deviations from ITE.

External Trips 941 - Quick Lubrication Vehicle Shop (General Urban/Suburban)
ITE does not recommend a particular pass-by% for this case.

937 - Coffee/Donut Shop with Drive-Through Window (General Urban/Suburban)

Weekday, Peak Hour of Adjacent Street Traffic, One Hour Between 4 and 6 p.m.

ITE does not recommend a particular pass-by% for this case.

934 - Fast-Food Restaurant with Drive-Through Window (General Urban/Suburban)

ITE does not recommend a particular pass-by% for this case.

934 - Fast-Food Restaurant with Drive-Through Window - 1 (General Urban/Suburban)

ITE does not recommend a particular pass-by% for this case.

720 - Medical-Dental Office Building - Stand-Alone (General Urban/Suburban)

ITE does not recommend a particular pass-by% for this case.

SUMMARY

Total Entering	227
Total Exiting	217
Total Entering Reduction	0
Total Exiting Reduction	0
Total Entering Internal Capture Reduction	0
Total Exiting Internal Capture Reduction	0
Total Entering Pass-by Reduction	118
Total Exiting Pass-by Reduction	111
Total Entering Non-Pass-by Trips	109
Total Exiting Non-Pass-by Trips	106




APPENDIX

ITE PASSERBY RATES


APPENDIX

TURNING MOVEMENT COUNTS

PROJECT ID: 24-120454-001
DATE: Thu, Nov 14, 2024

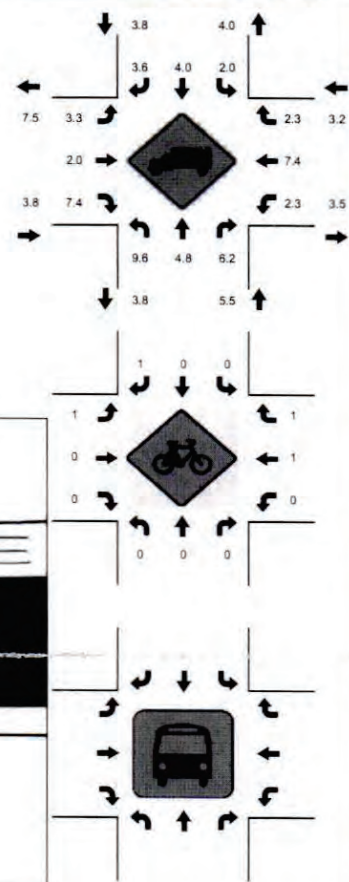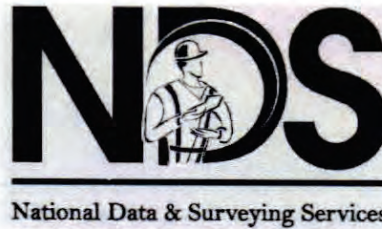[illegible]

PROJECT ID: 24-120454-001
DATE: Thu, Nov 14, 2024

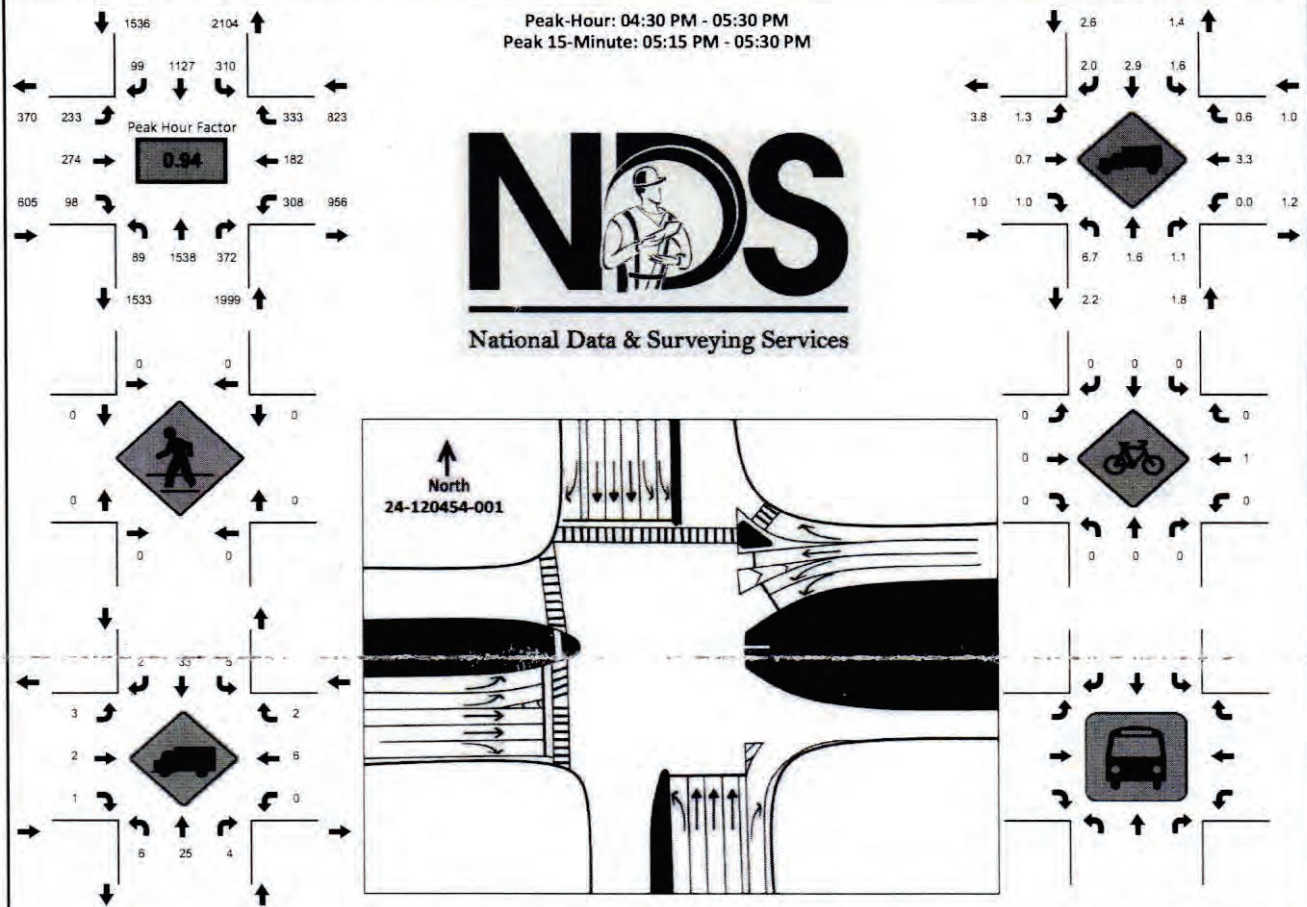[illegible]

PROJECT ID: 24-120454-002
DATE: Thu, Nov 14, 2024


Figure 1 displays a 3x3 grid of traffic intersection diagrams. Each diagram shows a central vehicle (car, truck, motorcycle, or bus) with arrows indicating movement directions and associated numerical values. The values represent different metrics, likely related to traffic flow or safety, for each movement direction.

The diagrams are arranged as follows:




- Top Row:**
 - Top-Left:** Central vehicle is a car. Arrows and values: Up (0.0), Down (0.0), Left (2.9), Right (2.7), Up-Left (0.0), Up-Right (0.0), Down-Left (0.0), Down-Right (0.0).
 - Top-Middle:** Central vehicle is a truck. Arrows and values: Up (0.0), Down (0.0), Left (0.0), Right (0.0), Up-Left (0.0), Up-Right (0.0), Down-Left (0.0), Down-Right (0.0).
 - Top-Right:** Central vehicle is a car. Arrows and values: Up (0.0), Down (0.0), Left (2.8), Right (2.4), Up-Left (0.0), Up-Right (0.0), Down-Left (0.0), Down-Right (0.0).
- Middle Row:**
 - Middle-Left:** Central vehicle is a motorcycle. Arrows and values: Up (0), Down (0), Left (0), Right (0), Up-Left (0), Up-Right (0), Down-Left (0), Down-Right (0).
 - Middle-Middle:** Central vehicle is a motorcycle. Arrows and values: Up (0), Down (0), Left (0), Right (0), Up-Left (0), Up-Right (0), Down-Left (0), Down-Right (0).
 - Middle-Right:** Central vehicle is a car. Arrows and values: Up (0), Down (0), Left (0), Right (0), Up-Left (0), Up-Right (0), Down-Left (0), Down-Right (0).
- Bottom Row:**
 - Bottom-Left:** Central vehicle is a bus. Arrows and values: Up (0), Down (0), Left (0), Right (0), Up-Left (0), Up-Right (0), Down-Left (0), Down-Right (0).
 - Bottom-Middle:** Central vehicle is a bus. Arrows and values: Up (0), Down (0), Left (0), Right (0), Up-Left (0), Up-Right (0), Down-Left (0), Down-Right (0).
 - Bottom-Right:** Central vehicle is a bus. Arrows and values: Up (0), Down (0), Left (0), Right (0), Up-Left (0), Up-Right (0), Down-Left (0), Down-Right (0).

[illegible]


PROJECT ID: 24-120454-002
DATE: Thu, Nov 14, 2024

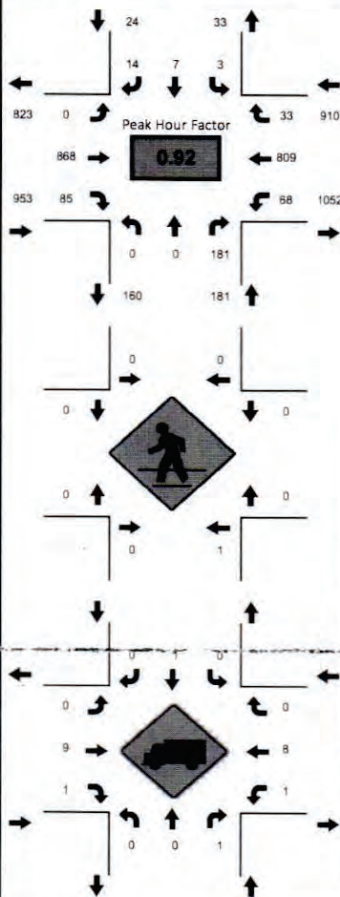


Peak-Hour: 04:30 PM - 05:30 PM
Peak 15-Minute: 05:15 PM - 05:30 PM

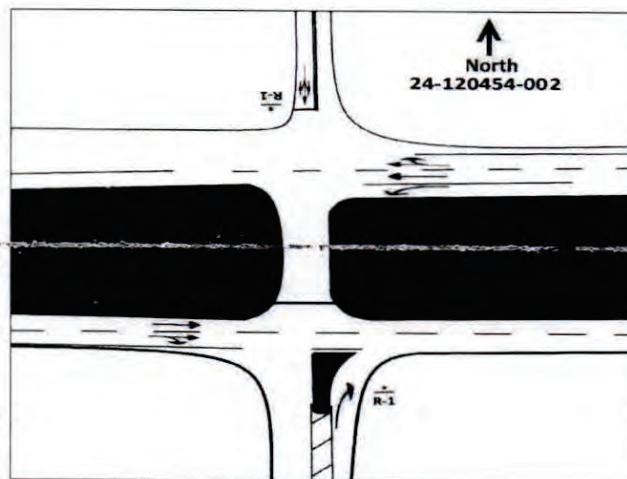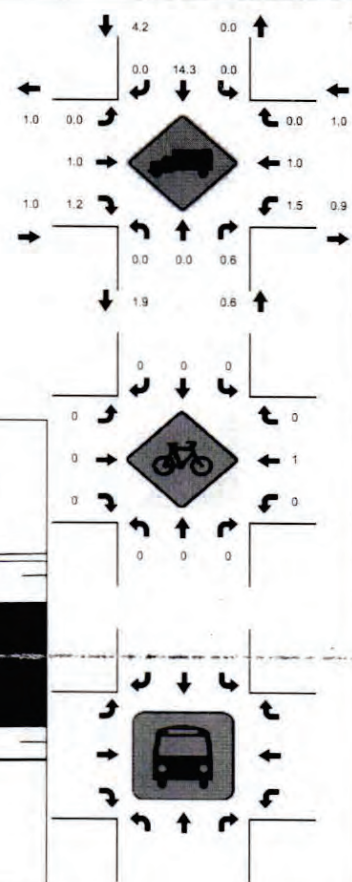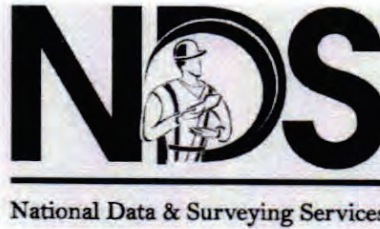[illegible]

PROJECT ID: 24-120454-003
DATE: Thu, Nov 14, 2024

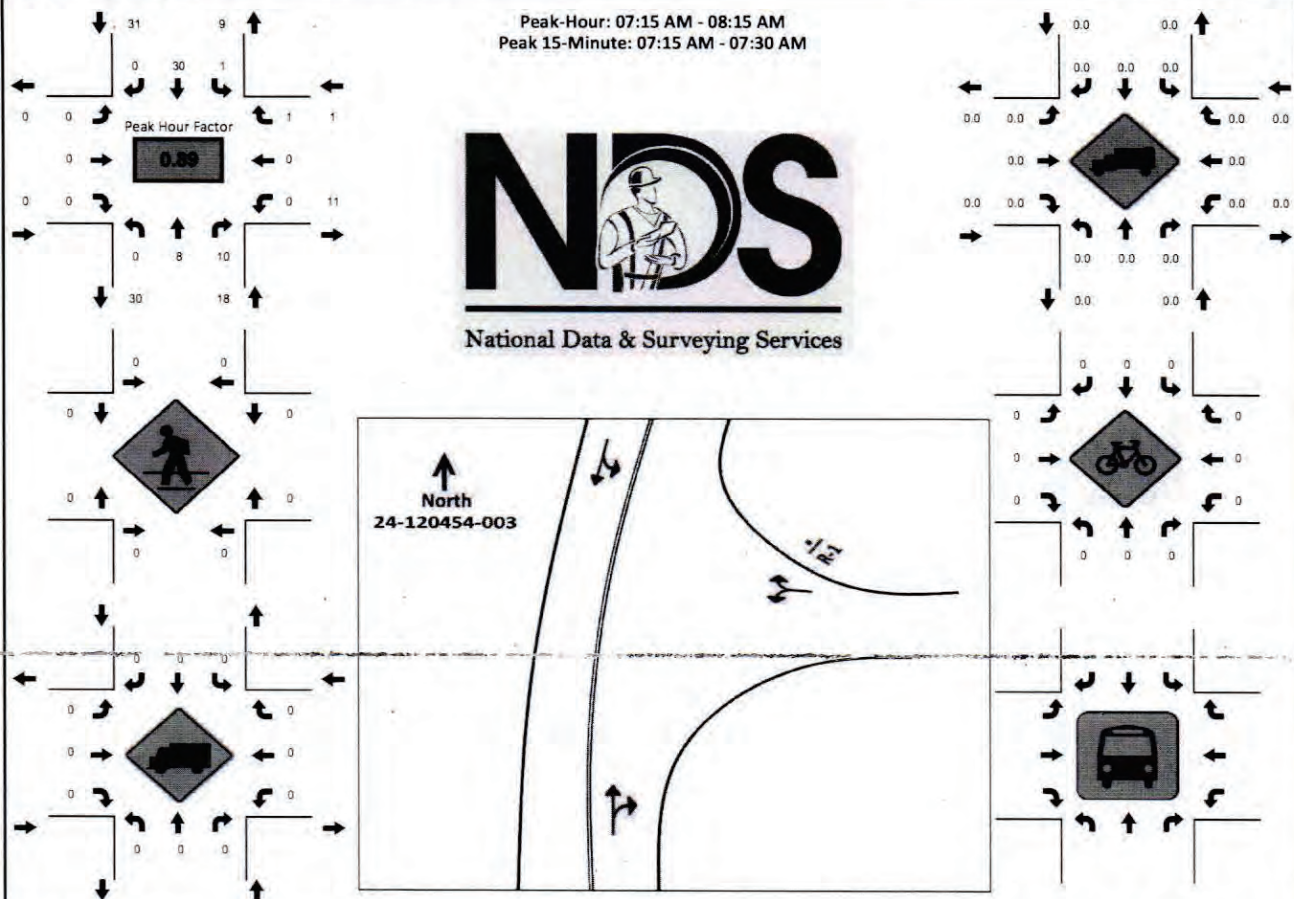[illegible]



PROJECT ID: 24-120454-003
DATE: Thu, Nov 14, 2024

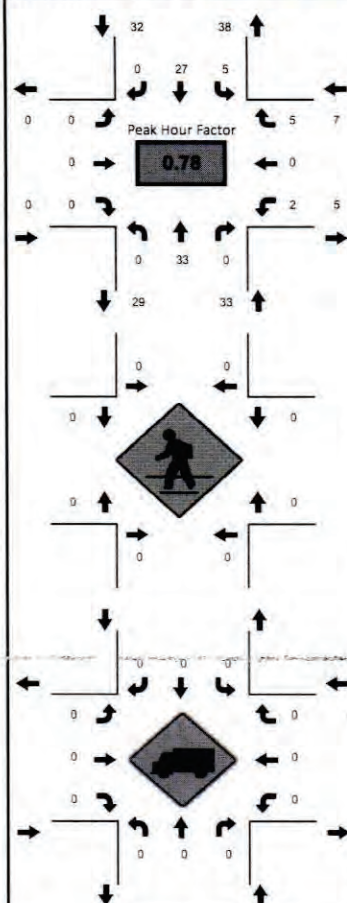




Peak-Hour: 04:00 PM - 05:00 PM
Peak 15-Minute: 04:45 PM - 05:00 PM




National Data & Surveying Services

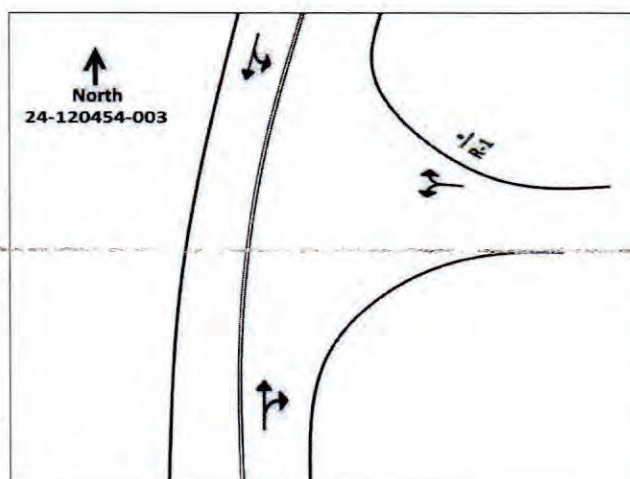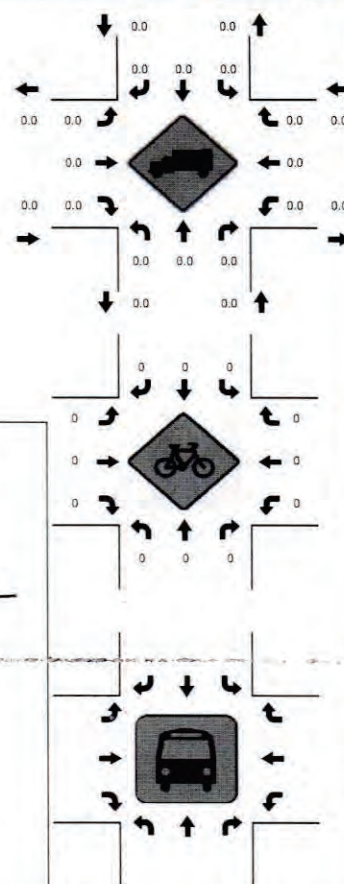[illegible]

PROJECT ID: 24-120454-005
DATE: Thu, Nov 14, 2024

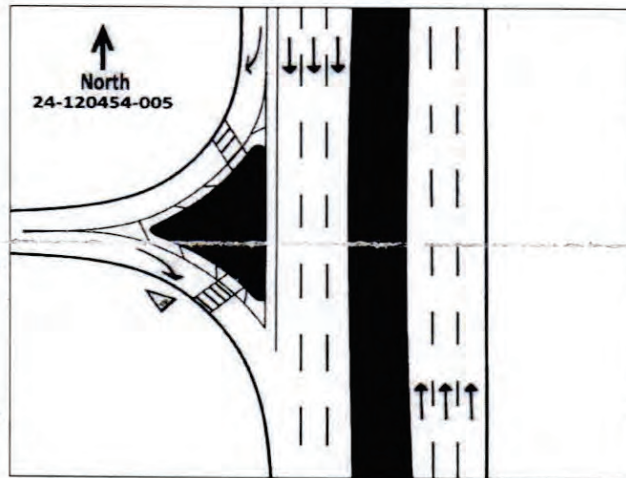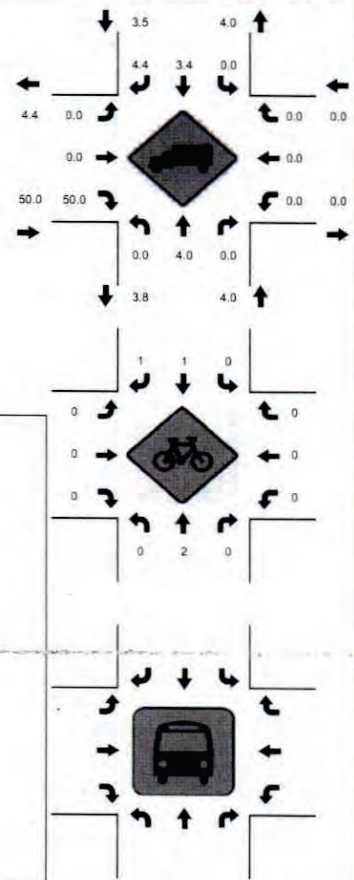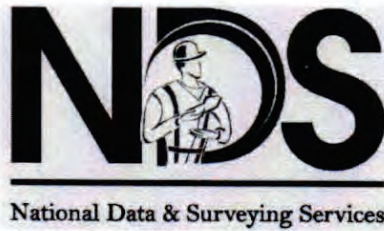[illegible]



PROJECT ID: 24-120454-005
DATE: Thu, Nov 14, 2024

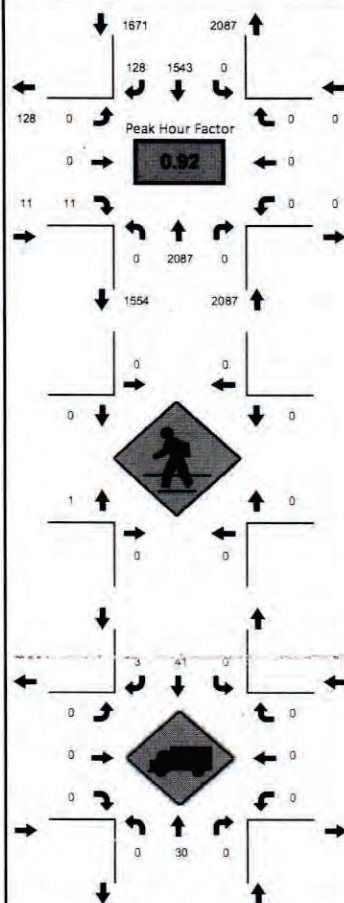

Peak-Hour: 04:30 PM - 05:30 PM
Peak 15-Minute: 05:00 PM - 05:15 PM



National Data & Surveying Services

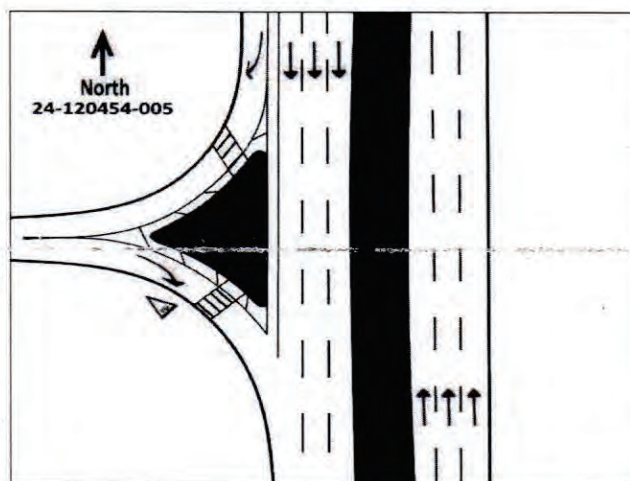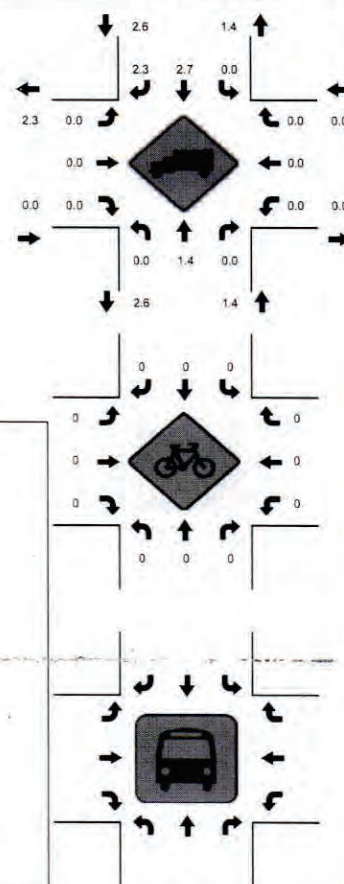[illegible]

APPENDIX

FDOT PEAK SEASON ADJUSTMENT FACTORS

2023 PEAK SEASON FACTOR CATEGORY REPORT - REPORT TYPE: ALL
 CATEGORY: 0800 HERNANDO COUNTYWIDE

WEEK	DATES	SF	MOCF: 0.96 PSCF
1	01/01/2023 - 01/07/2023	1.00	1.04
2	01/08/2023 - 01/14/2023	1.01	1.05
3	01/15/2023 - 01/21/2023	1.01	1.05
4	01/22/2023 - 01/28/2023	1.00	1.04
5	01/29/2023 - 02/04/2023	0.99	1.03
* 6	02/05/2023 - 02/11/2023	0.98	1.02
* 7	02/12/2023 - 02/18/2023	0.97	1.01
* 8	02/19/2023 - 02/25/2023	0.96	1.00
* 9	02/26/2023 - 03/04/2023	0.95	0.99
*10	03/05/2023 - 03/11/2023	0.94	0.98
*11	03/12/2023 - 03/18/2023	0.93	0.97
*12	03/19/2023 - 03/25/2023	0.94	0.98
*13	03/26/2023 - 04/01/2023	0.95	0.99
*14	04/02/2023 - 04/08/2023	0.96	1.00
*15	04/09/2023 - 04/15/2023	0.97	1.01
*16	04/16/2023 - 04/22/2023	0.97	1.01
*17	04/23/2023 - 04/29/2023	0.98	1.02
*18	04/30/2023 - 05/06/2023	0.99	1.03
19	05/07/2023 - 05/13/2023	0.99	1.03
20	05/14/2023 - 05/20/2023	1.00	1.04
21	05/21/2023 - 05/27/2023	1.01	1.05
22	05/28/2023 - 06/03/2023	1.02	1.06
23	06/04/2023 - 06/10/2023	1.04	1.08
24	06/11/2023 - 06/17/2023	1.05	1.09
25	06/18/2023 - 06/24/2023	1.05	1.09
26	06/25/2023 - 07/01/2023	1.05	1.09
27	07/02/2023 - 07/08/2023	1.05	1.09
28	07/09/2023 - 07/15/2023	1.05	1.09
29	07/16/2023 - 07/22/2023	1.05	1.09
30	07/23/2023 - 07/29/2023	1.05	1.09
31	07/30/2023 - 08/05/2023	1.06	1.10
32	08/06/2023 - 08/12/2023	1.06	1.10
33	08/13/2023 - 08/19/2023	1.06	1.10
34	08/20/2023 - 08/26/2023	1.05	1.09
35	08/27/2023 - 09/02/2023	1.04	1.08
36	09/03/2023 - 09/09/2023	1.04	1.08
37	09/10/2023 - 09/16/2023	1.03	1.07
38	09/17/2023 - 09/23/2023	1.02	1.06
39	09/24/2023 - 09/30/2023	1.01	1.05
40	10/01/2023 - 10/07/2023	1.01	1.05
41	10/08/2023 - 10/14/2023	1.00	1.04
42	10/15/2023 - 10/21/2023	1.00	1.04
43	10/22/2023 - 10/28/2023	0.99	1.03
44	10/29/2023 - 11/04/2023	0.99	1.03
45	11/05/2023 - 11/11/2023	0.99	1.03
46	11/12/2023 - 11/18/2023	0.99	1.03
47	11/19/2023 - 11/25/2023	0.99	1.03
48	11/26/2023 - 12/02/2023	0.99	1.03
49	12/03/2023 - 12/09/2023	0.99	1.03
50	12/10/2023 - 12/16/2023	1.00	1.04
51	12/17/2023 - 12/23/2023	1.00	1.04
52	12/24/2023 - 12/30/2023	1.01	1.05
53	12/31/2023 - 12/31/2023	1.01	1.05

* PEAK SEASON

09-MAR-2024 18:41:41

830UPD

7_0800_PKSEASON.TXT

APPENDIX
FDOT HISTORICAL COUNTS

FLORIDA DEPARTMENT OF TRANSPORTATION
TRANSPORTATION STATISTICS OFFICE
2023 HISTORICAL AADT REPORT

COUNTY: 08 - HERNANDO

SITE: 0036 - SR 55/US 19, N OF SPRING HILL DRIVE

YEAR	AADT	DIRECTION 1	DIRECTION 2	*K FACTOR	D FACTOR	T FACTOR
----	-----	-----	-----	-----	-----	-----
2023	41000 C	N 21000	S 20000	9.00	54.80	7.30
2022	46000 C	N 22000	S 24000	9.00	54.50	4.10
2021	45000 C	N 23000	S 22000	9.00	54.20	4.10
2020	45500 C	N 23000	S 22500	9.00	54.30	4.10
2019	43000 C	N 22000	S 21000	9.00	54.30	3.50
2018	43000 C	N 22000	S 21000	9.00	54.40	3.40
2017	46000 F	N 23000	S 23000	9.00	55.60	3.90
2016	43000 C	N 21500	S 21500	9.00	54.80	3.90
2015	41000 C	N 20500	S 20500	9.00	55.00	3.90
2014	39500 C	N 20000	S 19500	9.00	56.00	3.70
2013	39500 C	N 20000	S 19500	9.00	57.90	3.80
2012	40500 F	N 21000	S 19500	9.00	55.00	3.50
2011	40500 C	N 21000	S 19500	9.00	55.00	3.50
2010	39000 C	N 20000	S 19000	9.74	54.68	3.30
2009	39000 C	N 20000	S 19000	9.60	55.47	3.30
2008	35000 C	N 17500	S 17500	9.72	54.99	3.90

AADT FLAGS: C = COMPUTED; E = MANUAL ESTIMATE; F = FIRST YEAR ESTIMATE
S = SECOND YEAR ESTIMATE; T = THIRD YEAR ESTIMATE; R = FOURTH YEAR ESTIMATE
V = FIFTH YEAR ESTIMATE; 6 = SIXTH YEAR ESTIMATE; X = UNKNOWN
*K FACTOR: STARTING WITH YEAR 2011 IS STANDARDK, PRIOR YEARS ARE K30 VALUES

APPENDIX

SIGNAL TIMINGS

Hernando County, FL



MOVING TRAFFIC FORWARD

2 - Commercial Wy @ Spring Hill Dr - 192.168.150.243 - Econolite Type - ASC/3

Controller Timing Plan (MM) 2-1

Plan 1

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Direction																
Min Green	5	20	5	10	5	20	5	10	0	0	0	0	0	0	0	0
Bk Min Green	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CS Min Green	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Delay Green	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Walk	0	7	0	7	0	0	0	0	0	0	0	0	0	0	0	0
Walk2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Walk Max	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Ped Clear	0	50	0	35	0	0	0	0	0	0	0	0	0	0	0	0
Ped Clear 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Ped Clear Max	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Ped CO	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Vehicle Ext	3.0	4.0	4.0	3.0	3.5	4.0	4.0	3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Vehicle Ext 2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Max1	35	60	15	35	35	35	15	35	0	0	0	0	0	0	0	0
Max2	15	50	15	20	15	50	15	20	0	0	0	0	0	0	0	0
Max3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
DYM Max	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Dym Step	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Yellow	5.6	5.6	4.5	4.5	5.6	5.6	4.5	4.5	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Red Clear	2.6	2.6	3.5	3.5	2.6	2.6	3.5	3.5	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Red Max	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Red Revert	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Act B4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Sec/Act	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Max Int	30	30	30	30	30	30	30	30	30	30	30	30	0	0	0	0
Time B4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Cars Wt	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
STPTDuc	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
TTReduc	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Min Gap	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



MOVING TRAFFIC FORWARD

2 - Commercial Wy @ Spring Hill Dr - 192.168.150.243 - Econolite Type - ASC/3

Coordination Pattern Data**Coordinator Pattern Data (MM) 3-2****Coordinator Pattern # 1**

Split Pattern	1	TS2 (Pat-Off)	0-1	Splits In	Seconds
Cycle	120	Std (COS)	9	Offsets In	Seconds
Offset Value	91s	Dwell/Add Time	0		
Actuated Coord Yes		Timing Plan	0		
Actuated Walk Rest	No	Sequence	2		
Phase					
Reservice	No	Action Plan	0		
Max Select	None	Force Off	None		

Split Preference Phases

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Description																
Splits (Split Pat 1)	20	50	22	28	24	46	28	22	0	0	0	0	0	0	0	0
Pref 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pref 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Ring	1	2	3	4
Ring Split Ext	0	0	0	0
Ring Displacement	-	0	0	0
Split Sum	120s	120s	0s	0s

Misc. Data

Veh Perm 1	0	Veh Perm 2	0	Veh Perm 2 Disp	0
Split Demand Pat 1	0	Split Demand Pat 2	0	Crossing Arterial Pat	0

Split Pattern

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Coord Phase		X				X										
Vehicle Recall																
Pedestrian Recall																
Recall to Max. Time		X				X										
Omit Phase													X	X	X	X
Special Function Outputs																

Coordinator Pattern # 2

Split Pattern	2	TS2 (Pat-Off)	0-2	Splits In	Seconds
Cycle	140	Std (COS)	10	Offsets In	Seconds
Offset Value	55s	Dwell/Add Time	0		
Actuated Coord	Yes	Timing Plan	0		
Actuated Walk	No	Sequence	1		
Rest					
Phase	No	Action Plan	0		
Reservice					
Max Select	None	Force Off	None		

Split Preference Phases

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Description																
Splits (Split Pat 2)	20	65	25	30	30	55	30	25	0	0	0	0	0	0	0	0
Pref 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pref 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Ring	1	2	3	4
Ring Split Ext	0	0	0	0
Ring		0	0	0
Displacement				
Split Sum	140s	140s	0s	0s

Misc. Data

Veh Perm 1	0	Veh Perm 2	0	Veh Perm 2 Disp	0
Split Demand	0	Split Demand	0	Crossing Arterial	0
Pat 1		Pat 2		Pat	

Split Pattern

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Coord Phase		X				X										
Vehicle Recall																
Pedestrian Recall																
Recall to Max. Time		X				X										
Omit Phase													X	X	X	X
Special Function Outputs																

Coordinator Pattern # 3

Split Pattern	3	TS2 (Pat-Off)	0-3	Splits In	Seconds
Cycle	140	Std (COS)	82	Offsets In	Seconds
Offset Value	59s	Dwell/Add Time	0		
Actuated Coord	Yes	Timing Plan	0		
Actuated Walk	No	Sequence	1		
Rest					
Phase	No	Action Plan	0		
Reservice					
Max Select	None	Force Off	None		

Split Preference Phases

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Description																
Splits (Split Pat 3)	20	67	25	28	28	59	28	25	0	0	0	0	0	0	0	0

Pref 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pref 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Ring	1	2	3	4
Ring Split Ext	0	0	0	0
Ring Displacement	-	0	0	0
Split Sum	140s	140s	0s	0s

Misc. Data

Veh Perm 1 0 Veh Perm 2 0 Veh Perm 2 Disp 0
 Split Demand 0 Split Demand 0 Crossing Arterial 0
 Pat 1 Pat 2 Pat

Split Pattern

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Coord Phase		X				X										
Vehicle Recall																
Pedestrian Recall																
Recall to Max. Time		X				X										
Omit Phase													X	X	X	X
Special Function Outputs																

Coordinator Pattern # 4

Split Pattern	4	TS2 (Pat-Off)	1-1	Splits In	Seconds
Cycle	110	Std (COS)	12	Offsets In	Seconds
Offset Value	55s	Dwell/Add Time	0		
Actuated Coord	Yes	Timing Plan	0		
Actuated Walk Rest	No	Sequence	4		
Phase	No	Action Plan	0		
Reservice					
Max Select	None	Force Off	None		

Split Preference Phases

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Description																
Splits (Split Pat 4)	20	48	20	22	20	48	20	22	0	0	0	0	0	0	0	0
Pref 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pref 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Ring	1	2	3	4
Ring Split Ext	0	0	0	0
Ring Displacement	-	0	0	0
Split Sum	110s	110s	0s	0s

Misc. Data

Veh Perm 1	0	Veh Perm 2	0	Veh Perm 2 Disp	0
Split Demand Pat 1	0	Split Demand Pat 2	0	Crossing Arterial Pat	0

Split Pattern

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Coord Phase		X				X										
Vehicle Recall																
Pedestrian Recall																
Recall to Max. Time		X				X										
Omit Phase													X	X	X	X
Special Function Outputs																

Coordinator Pattern # 5

Split Pattern	5	TS2 (Pat-Off)	1-2	Splits In	Seconds
Cycle	140	Std (COS)	154	Offsets In	Seconds
Offset Value	55s	Dwell/Add Time	0		
Actuated Coord	Yes	Timing Plan	0		
Actuated Walk Rest	No	Sequence	1		
Phase	No	Action Plan	0		
Reservice					
Max Select	None	Force Off	None		

Split Preference Phases

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Description																
Splits (Split Pat 5)	25	58	27	30	30	53	32	25	0	0	0	0	0	0	0	0

Pref 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pref 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Ring	1	2	3	4
Ring Split Ext	0	0	0	0
Ring Displacement	-	0	0	0
Split Sum	140s	140s	0s	0s

Misc. Data

Veh Perm 1 0 Veh Perm 2 0 Veh Perm 2 Disp 0
 Split Demand 0 Split Demand 0 Crossing Arterial 0
 Pat 1 Pat 2 Pat

Split Pattern

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Coord Phase		X				X										
Vehicle Recall																
Pedestrian Recall																
Recall to Max. Time		X				X										
Omit Phase													X	X	X	X
Special Function Outputs																

Coordinator Pattern # 6

Split Pattern	6	TS2 (Pat-Off)	1-3	Splits In	Seconds
Cycle	120	Std (COS)	81	Offsets In	Seconds
Offset Value	91s	Dwell/Add Time	0		
Actuated Coord	Yes	Timing Plan	0		
Actuated Walk	No	Sequence	2		
Phase	No	Action Plan	0		
Reservice					
Max Select	None	Force Off	None		

Split Preference Phases

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Description																
Splits (Split Pat 6)	20	50	22	28	24	46	28	22	0	0	0	0	0	0	0	0
Pref 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Pref 2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Ring	1	2	3	4
Ring Split Ext	0	0	0	0
Ring Displacement	-	0	0	0
Split Sum	120s	120s	0s	0s

Misc. Data

Veh Perm 1	0	Veh Perm 2	0	Veh Perm 2 Disp	0
Split Demand Pat 1	0	Split Demand Pat 2	0	Crossing Arterial Pat	0

Split Pattern

Phase	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Coord Phase		X				X										
Vehicle Recall																
Pedestrian Recall																
Recall to Max. Time		X				X										
Omit Phase													X	X	X	X
Special Function Outputs																

APPENDIX

INTERSECTION ANALYSIS

Timings

1: US 19 & Spring Hill Dr

12/20/2024

												
Lane Configurations	↔↔	↕↕	↗	↔↔	↕	↗	↔	↔↔↔	↗	↔↔	↕↕↕	↗
Traffic Volume (vph)	190	148	93	472	160	290	104	899	162	180	1180	62
Future Volume (vph)	190	148	93	472	160	290	104	899	162	180	1180	62
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	12	12	12	12	12	12	12	12	12
Grade (%)		0%			0%			0%			0%	
Storage Length (ft)	400		150	0		0	500		550	350		545
Storage Lanes	2		1	2		1	1		1	2		1
Taper Length (ft)	25			25			25			25		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			40			55			55	
Link Distance (ft)		1000			300			1000			1180	
Travel Time (s)		22.7			5.1			12.4			14.6	
Confl. Peds. (#/hr)												
Confl. Bikes (#/hr)												
Peak Hour Factor	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96
Growth Factor	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
Heavy Vehicles (%)	3%	2%	7%	2%	7%	2%	10%	5%	6%	2%	4%	4%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	0	0	0	0	0
Parking (#/hr)												
Mid-Block Traffic (%)		0%			0%			0%			0%	
Shared Lane Traffic (%)												
Turn Type	Prot	NA	Perm	Prot	NA	Perm	Prot	NA	Perm	Prot	NA	Perm
Protected Phases	3	8		7	4		1	6		5	2	
Permitted Phases			8			4			6			2
Detector Phase	3	8	8	7	4	4	1	6	6	5	2	2
Switch Phase												
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	20.0	20.0	5.0	20.0	20.0
Minimum Split (s)	14.0	18.0	18.0	14.0	18.0	18.0	14.0	28.2	28.2	14.0	28.2	28.2
Total Split (s)	22.0	22.0	22.0	28.0	28.0	28.0	20.0	46.0	46.0	24.0	50.0	50.0
Total Split (%)	18.3%	18.3%	18.3%	23.3%	23.3%	23.3%	16.7%	38.3%	38.3%	20.0%	41.7%	41.7%
Yellow Time (s)	4.5	4.5	4.5	4.5	4.5	4.5	5.6	5.6	5.6	5.6	5.6	5.6
All-Red Time (s)	3.5	3.5	3.5	3.5	3.5	3.5	2.6	2.6	2.6	2.6	2.6	2.6
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	8.0	8.0	8.0	8.0	8.0	8.0	8.2	8.2	8.2	8.2	8.2	8.2
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	None	C-Min	C-Min	None	C-Min	C-Min
Act Effct Green (s)	11.9	11.5	11.5	20.3	19.9	19.9	11.6	43.9	43.9	11.9	44.2	44.2
Actuated g/C Ratio	0.10	0.10	0.10	0.17	0.17	0.17	0.10	0.37	0.37	0.10	0.37	0.37
v/c Ratio	0.59	0.46	0.30	0.85	0.57	0.66	0.68	0.52	0.25	0.55	0.67	0.09
Control Delay	58.7	55.5	2.4	62.7	54.5	18.6	74.0	31.8	3.6	57.6	34.6	0.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	58.7	55.5	2.4	62.7	54.5	18.6	74.0	31.8	3.6	57.6	34.6	0.3
LOS	E	E	A	E	D	B	E	C	A	E	C	A
Approach Delay		45.4			47.4			31.6			36.0	
Approach LOS		D			D			C			D	
Intersection Summary												

Timings
1: US 19 & Spring Hill Dr

12/20/2024

Area Type:	Other
Cycle Length: 120	
Actuated Cycle Length: 120	
Offset: 0 (0%), Referenced to phase 2:SBT and 6:NBT, Start of Green	
Natural Cycle: 90	
Control Type: Actuated-Coordinated	
Maximum v/c Ratio: 0.85	
Intersection Signal Delay: 38.4	Intersection LOS: D
Intersection Capacity Utilization 77.4%	ICU Level of Service D
Analysis Period (min) 15	

Splits and Phases: 1: US 19 & Spring Hill Dr



HCM 6th TWSC
2: US 19 & Driveway B

12/20/2024

Int Delay, s/veh 1.2

Movement	WB	WB	NB	NB	SB	SB
Lane Configurations	↖	↖	↑↑↑	↖	↖	↑↑↑
Traffic Vol, veh/h	25	48	1265	100	66	1423
Future Vol, veh/h	25	48	1265	100	66	1423
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	Free
Storage Length	0	0	-	405	405	-
Veh in Median Storage, #	2	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	4	2	2	4
Mvmt Flow	26	51	1332	105	69	1498

Major/Minor	Minor1	Major1	Major2	Major3	Major4
Conflicting Flow All	2069	666	0	0	1437
Stage 1	1332	-	-	-	-
Stage 2	737	-	-	-	-
Critical Hdwy	5.74	7.14	-	-	5.34
Critical Hdwy Stg 1	6.64	-	-	-	-
Critical Hdwy Stg 2	6.04	-	-	-	-
Follow-up Hdwy	3.82	3.92	-	-	3.12
Pot Cap-1 Maneuver	86	345	-	-	239
Stage 1	151	-	-	-	-
Stage 2	394	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	61	345	-	-	239
Mov Cap-2 Maneuver	134	-	-	-	-
Stage 1	151	-	-	-	-
Stage 2	280	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	24.4	0	1.2
HCM LOS	C		

Minor Lane/Major Mvmt	NBT	NBWB	NBWB2	SB	SB2
Capacity (veh/h)	-	-	134	345	239
HCM Lane V/C Ratio	-	-	0.196	0.146	0.291
HCM Control Delay (s)	-	-	38.3	17.2	26.1
HCM Lane LOS	-	-	E	C	D
HCM 95th %tile Q(veh)	-	-	0.7	0.5	1.2

HCM 6th TWSC
3: Pinehurst Dr & Spring Hill Dr

12/20/2024

Int Delay, s/veh 4.7

	EBL	EBT	EBR	WBL	WBT	WBR	SEB	SEB	SEB	SEB	SEB	SEB
Lane Configurations	↑↑			↑↑			↑			↑↑		
Traffic Vol, veh/h	0	444	66	59	724	92	0	0	49	93	5	135
Future Vol, veh/h	0	444	66	59	724	92	0	0	49	93	5	135
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	150	-	-	-	-	0	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	2	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	95	95	95	95	95	95	95	95	95	95	95	95
Heavy Vehicles, %	0	3	2	2	3	0	0	0	2	0	0	0
Mvmt Flow	0	467	69	62	762	97	0	0	52	98	5	142

Major/Minor	Major1		Major2		Minor1		Minor2					
Conflicting Flow All	-	0	0	536	0	0	-	-	268	1169	1471	430
Stage 1	-	-	-	-	-	-	-	-	-	935	935	-
Stage 2	-	-	-	-	-	-	-	-	-	234	536	-
Critical Hdwy	-	-	-	4.14	-	-	-	-	6.94	7.5	6.5	6.9
Critical Hdwy Stg 1	-	-	-	-	-	-	-	-	-	6.5	5.5	-
Critical Hdwy Stg 2	-	-	-	-	-	-	-	-	-	6.5	5.5	-
Follow-up Hdwy	-	-	-	2.22	-	-	-	-	3.32	3.5	4	3.3
Pot Cap-1 Maneuver	0	-	-	1028	-	-	0	0	730	151	128	579
Stage 1	0	-	-	-	-	-	0	0	-	289	347	-
Stage 2	0	-	-	-	-	-	0	0	-	754	527	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	1028	-	-	-	-	730	134	120	579
Mov Cap-2 Maneuver	-	-	-	-	-	-	-	-	-	264	274	-
Stage 1	-	-	-	-	-	-	-	-	-	289	326	-
Stage 2	-	-	-	-	-	-	-	-	-	701	527	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	0	0.6	10.3	29.2
HCM LOS			B	D

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	WBR	SEBn1
Capacity (veh/h)	730	-	-	1028	-	-	386
HCM Lane V/C Ratio	0.071	-	-	0.06	-	-	0.635
HCM Control Delay (s)	10.3	-	-	8.7	-	-	29.2
HCM Lane LOS	B	-	-	A	-	-	D
HCM 95th %tile Q(veh)	0.2	-	-	0.2	-	-	4.2

Int Delay, s/veh 7.3

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	199	0	0	1	78	8	11	1	32	11
Future Vol, veh/h	0	0	199	0	0	1	78	8	11	1	32	11
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	0	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	100	92
Heavy Vehicles, %	0	0	0	0	0	0	0	0	0	0	0	0
Mvmt Flow	0	0	216	0	0	1	85	9	12	1	32	12

Major/Minor	Minor2		Minor1			Major1			Major2			
Conflicting Flow All	-	-	38	333	231	15	44	0	0	21	0	0
Stage 1	-	-	-	185	185	-	-	-	-	-	-	-
Stage 2	-	-	-	148	46	-	-	-	-	-	-	-
Critical Hdwy	-	-	6.2	7.1	6.5	6.2	4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	-	-	-	6.1	5.5	-	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	6.1	5.5	-	-	-	-	-	-	-
Follow-up Hdwy	-	-	3.3	3.5	4	3.3	2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	0	0	1040	624	672	1070	1577	-	-	1608	-	-
Stage 1	0	0	-	821	751	-	-	-	-	-	-	-
Stage 2	0	0	-	859	861	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	-	-	1040	473	634	1070	1577	-	-	1608	-	-
Mov Cap-2 Maneuver	-	-	-	473	634	-	-	-	-	-	-	-
Stage 1	-	-	-	776	710	-	-	-	-	-	-	-
Stage 2	-	-	-	680	860	-	-	-	-	-	-	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	9.4	8.4	6	0.2
HCM LOS	A	A		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	SBL	SBT	SBR
Capacity (veh/h)	1577	-	-	1040	1070	1608	-	-
HCM Lane V/C Ratio	0.054	-	-	0.208	0.001	0.001	-	-
HCM Control Delay (s)	7.4	0	-	9.4	8.4	7.2	0	-
HCM Lane LOS	A	A	-	A	A	A	A	-
HCM 95th %tile Q(veh)	0.2	-	-	0.8	0	0	-	-

Timings

1: US 19 & Spring Hill Dr

12/23/2024

												
Lane Configurations	↰↰	↕↕	↰	↰↰	↕	↰	↰	↕↕↕	↰	↰↰	↕↕↕	↰
Traffic Volume (vph)	265	281	101	362	201	361	92	1654	382	327	1172	107
Future Volume (vph)	265	281	101	362	201	361	92	1654	382	327	1172	107
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	12	12	12	12	12	12	12	12	12
Grade (%)		0%			0%			0%			0%	
Storage Length (ft)	400		150	0		0	500		550	350		545
Storage Lanes	2		1	2		1	1		1	2		1
Taper Length (ft)	25			25			25			25		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			40			55			55	
Link Distance (ft)		1000			300			1000			1180	
Travel Time (s)		22.7			5.1			12.4			14.6	
Confl. Peds. (#/hr)												
Confl. Bikes (#/hr)												
Peak Hour Factor	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Growth Factor	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
Heavy Vehicles (%)	2%	2%	2%	2%	3%	2%	7%	2%	2%	2%	3%	2%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	0	0	0	0	0
Parking (#/hr)												
Mid-Block Traffic (%)		0%			0%			0%			0%	
Shared Lane Traffic (%)												
Turn Type	Prot	NA	Perm	Prot	NA	Perm	Prot	NA	Perm	Prot	NA	Perm
Protected Phases	3	8		7	4		1	6		5	2	
Permitted Phases			8			4			6			2
Detector Phase	3	8	8	7	4	4	1	6	6	5	2	2
Switch Phase												
Minimum Initial (s)	5.0	10.0	10.0	5.0	10.0	10.0	5.0	20.0	20.0	5.0	20.0	20.0
Minimum Split (s)	14.0	18.0	18.0	14.0	18.0	18.0	14.0	28.2	28.2	14.0	28.2	28.2
Total Split (s)	25.0	25.0	25.0	28.0	28.0	28.0	20.0	59.0	59.0	28.0	67.0	67.0
Total Split (%)	17.9%	17.9%	17.9%	20.0%	20.0%	20.0%	14.3%	42.1%	42.1%	20.0%	47.9%	47.9%
Yellow Time (s)	4.5	4.5	4.5	4.5	4.5	4.5	5.6	5.6	5.6	5.6	5.6	5.6
All-Red Time (s)	3.5	3.5	3.5	3.5	3.5	3.5	2.6	2.6	2.6	2.6	2.6	2.6
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	8.0	8.0	8.0	8.0	8.0	8.0	8.2	8.2	8.2	8.2	8.2	8.2
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	None	C-Min	C-Min	None	C-Min	C-Min
Act Effct Green (s)	15.6	18.0	18.0	19.0	21.4	21.4	11.1	52.4	52.4	18.2	59.5	59.5
Actuated g/C Ratio	0.11	0.13	0.13	0.14	0.15	0.15	0.08	0.37	0.37	0.13	0.42	0.42
v/c Ratio	0.74	0.66	0.31	0.83	0.76	0.99	0.73	0.92	0.48	0.78	0.58	0.15
Control Delay	72.2	66.0	3.0	74.3	75.0	75.4	92.5	51.3	4.8	71.8	32.3	1.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	72.2	66.0	3.0	74.3	75.0	75.4	92.5	51.3	4.8	71.8	32.3	1.2
LOS	E	E	A	E	E	E	F	D	A	E	C	A
Approach Delay		58.8			74.9			44.7			38.3	
Approach LOS		E			E			D			D	
Intersection Summary												

Timings

1: US 19 & Spring Hill Dr

12/23/2024

Area Type: Other

Cycle Length: 140

Actuated Cycle Length: 140

Offset: 0 (0%), Referenced to phase 2:SBT and 6:NBT, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.99

Intersection Signal Delay: 49.7

Intersection LOS: D

Intersection Capacity Utilization 86.9%

ICU Level of Service E

Analysis Period (min) 15

Splits and Phases: 1: US 19 & Spring Hill Dr

 Ø1	 Ø2 (R)	 Ø3	 Ø4
 Ø5	 Ø6 (R)	 Ø7	 Ø8

HCM 6th TWSC
2: US 19 & Driveway B

12/23/2024

Int Delay, s/veh 2.2

Movement	WB	WB	NBT	NBT	SB	SB
Lane Configurations	↖	↖	↑↑↑	↖	↖	↑↑↑
Traffic Vol, veh/h	20	37	2182	69	37	1616
Future Vol, veh/h	20	37	2182	69	37	1616
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	Free
Storage Length	0	0	-	405	405	-
Veh in Median Storage, #	2	-	0	-	-	0
Grade, %	0	-	0	-	-	0
Peak Hour Factor	95	95	95	95	95	95
Heavy Vehicles, %	2	2	2	2	2	3
Mvmt Flow	21	39	2297	73	39	1701

Major/Minor	Minor1	Major1	Major2		
Conflicting Flow All	3055	1149	0	0	2370
Stage 1	2297	-	-	-	-
Stage 2	758	-	-	-	-
Critical Hdwy	5.74	7.14	-	-	5.34
Critical Hdwy Stg 1	6.64	-	-	-	-
Critical Hdwy Stg 2	6.04	-	-	-	-
Follow-up Hdwy	3.82	3.92	-	-	3.12
Pot Cap-1 Maneuver	24	165	-	-	81
Stage 1	36	-	-	-	-
Stage 2	385	-	-	-	-
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	12	165	-	-	81
Mov Cap-2 Maneuver	34	-	-	-	-
Stage 1	36	-	-	-	-
Stage 2	200	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	97.9	0	1.9
HCM LOS	F		

Minor Lane/Major Mvmt	NBT	NBT	WB	WB	SB	SB
Capacity (veh/h)	-	-	34	165	81	-
HCM Lane V/C Ratio	-	-	0.619	0.236	0.481	-
HCM Control Delay (s)	-	-	217.1	33.4	85.2	-
HCM Lane LOS	-	-	F	D	F	-
HCM 95th %ile Q(veh)	-	-	2.1	0.9	2	-

Notes
-: Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

HCM 6th TWSC
3: Pinehurst Dr & Spring Hill Dr

12/23/2024

Int Delay, s/veh 4.7

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑↑			↑	↑↑				↑		↑↑	
Traffic Vol, veh/h	0	890	90	71	850	79	0	0	190	67	7	74
Future Vol, veh/h	0	890	90	71	850	79	0	0	190	67	7	74
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	150	-	-	-	-	0	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	2	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	0	2	2	2	2	0	0	0	2	0	0	0
Mvmt Flow	0	967	98	77	924	86	0	0	207	73	8	80

Major/Minor	Major1		Major2		Minor1		Minor2					
Conflicting Flow All	-	0	0	1065	0	0	-	-	533	1605	2186	505
Stage 1	-	-	-	-	-	-	-	-	-	1121	1121	-
Stage 2	-	-	-	-	-	-	-	-	-	484	1065	-
Critical Hdwy	-	-	-	4.14	-	-	-	-	6.94	7.5	6.5	6.9
Critical Hdwy Stg 1	-	-	-	-	-	-	-	-	-	6.5	5.5	-
Critical Hdwy Stg 2	-	-	-	-	-	-	-	-	-	6.5	5.5	-
Follow-up Hdwy	-	-	-	2.22	-	-	-	-	3.32	3.5	4	3.3
Pot Cap-1 Maneuver	0	-	-	650	-	-	0	0	491	~72	46	518
Stage 1	0	-	-	-	-	0	0	-	223	284	-	-
Stage 2	0	-	-	-	-	0	0	-	538	302	-	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	650	-	-	-	-	491	~38	41	518
Mov Cap-2 Maneuver	-	-	-	-	-	-	-	-	-	157	163	-
Stage 1	-	-	-	-	-	-	-	-	-	223	250	-
Stage 2	-	-	-	-	-	-	-	-	-	312	302	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	0	0.8	17.6	45.1
HCM LOS			C	E

Minor Lane/Major Mvmt	NBLn1	GBT	EBR	WBL	WBT	WBR	SBLn1
Capacity (veh/h)	491	-	-	650	-	-	242
HCM Lane V/C Ratio	0.421	-	-	0.119	-	-	0.665
HCM Control Delay (s)	17.6	-	-	11.3	-	-	45.1
HCM Lane LOS	C	-	-	B	-	-	E
HCM 95th %tile Q(veh)	2.1	-	-	0.4	-	-	4.2

Notes			
-: Volume exceeds capacity	\$: Delay exceeds 300s	+: Computation Not Defined	*: All major volume in platoon

Int Delay, s/veh 6.1

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Vol, veh/h	0	0	123	2	0	5	44	35	0	5	29	7
Future Vol, veh/h	0	0	123	2	0	5	44	35	0	5	29	7
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	0	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	100	92
Heavy Vehicles, %	0	0	0	0	0	0	0	0	0	0	0	0
Mvmt Flow	0	0	134	2	0	5	48	38	0	5	29	8


Major/Minor	Minor2		Minor1		Major1			Major2				
Conflicting Flow All	-	-	33	244	181	38	37	0	0	38	0	0
Stage 1	-	-	-	134	134	-	-	-	-	-	-	-
Stage 2	-	-	-	110	47	-	-	-	-	-	-	-
Critical Hdwy	-	-	6.2	7.1	6.5	6.2	4.1	-	-	4.1	-	-
Critical Hdwy Stg 1	-	-	-	6.1	5.5	-	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	6.1	5.5	-	-	-	-	-	-	-
Follow-up Hdwy	-	-	3.3	3.5	4	3.3	2.2	-	-	2.2	-	-
Pot Cap-1 Maneuver	0	0	1046	714	717	1040	1587	-	-	1585	-	-
Stage 1	0	0	-	874	789	-	-	-	-	-	-	-
Stage 2	0	0	-	900	860	-	-	-	-	-	-	-
Platoon blocked, %												
Mov Cap-1 Maneuver	-	-	1046	607	693	1040	1587	-	-	1585	-	-
Mov Cap-2 Maneuver	-	-	-	607	693	-	-	-	-	-	-	-
Stage 1	-	-	-	847	765	-	-	-	-	-	-	-
Stage 2	-	-	-	783	857	-	-	-	-	-	-	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	8.9	9.2	4.1	0.9
HCM LOS	A	A		

Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	SBL	SBT	SBR
Capacity (veh/h)	1587	-	-	1046	864	1585	-	-
HCM Lane V/C Ratio	0.03	-	-	0.128	0.009	0.003	-	-
HCM Control Delay (s)	7.3	0	-	8.9	9.2	7.3	0	-
HCM Lane LOS	A	A	-	A	A	A	A	-
HCM 95th %tile Q(veh)	0.1	-	-	0.4	0	0	-	-

APPENDIX

TURN LANE WARRANTS

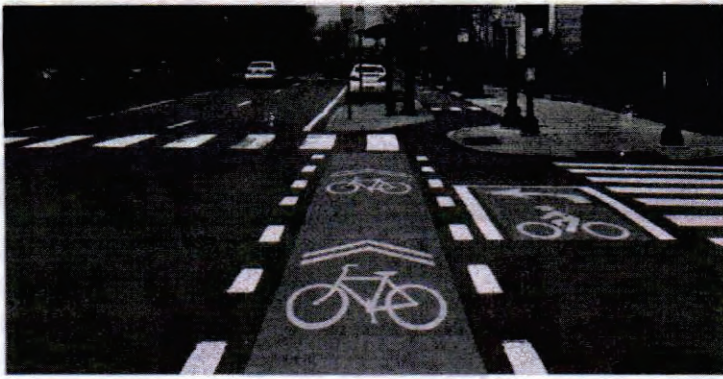

Multimodal Access Management Guidebook


October 2023



STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION
SYSTEMS IMPLEMENTATION OFFICE

605 Suwannee Street, MS 19 • Tallahassee, FL 32399

www.fdot.gov/planning

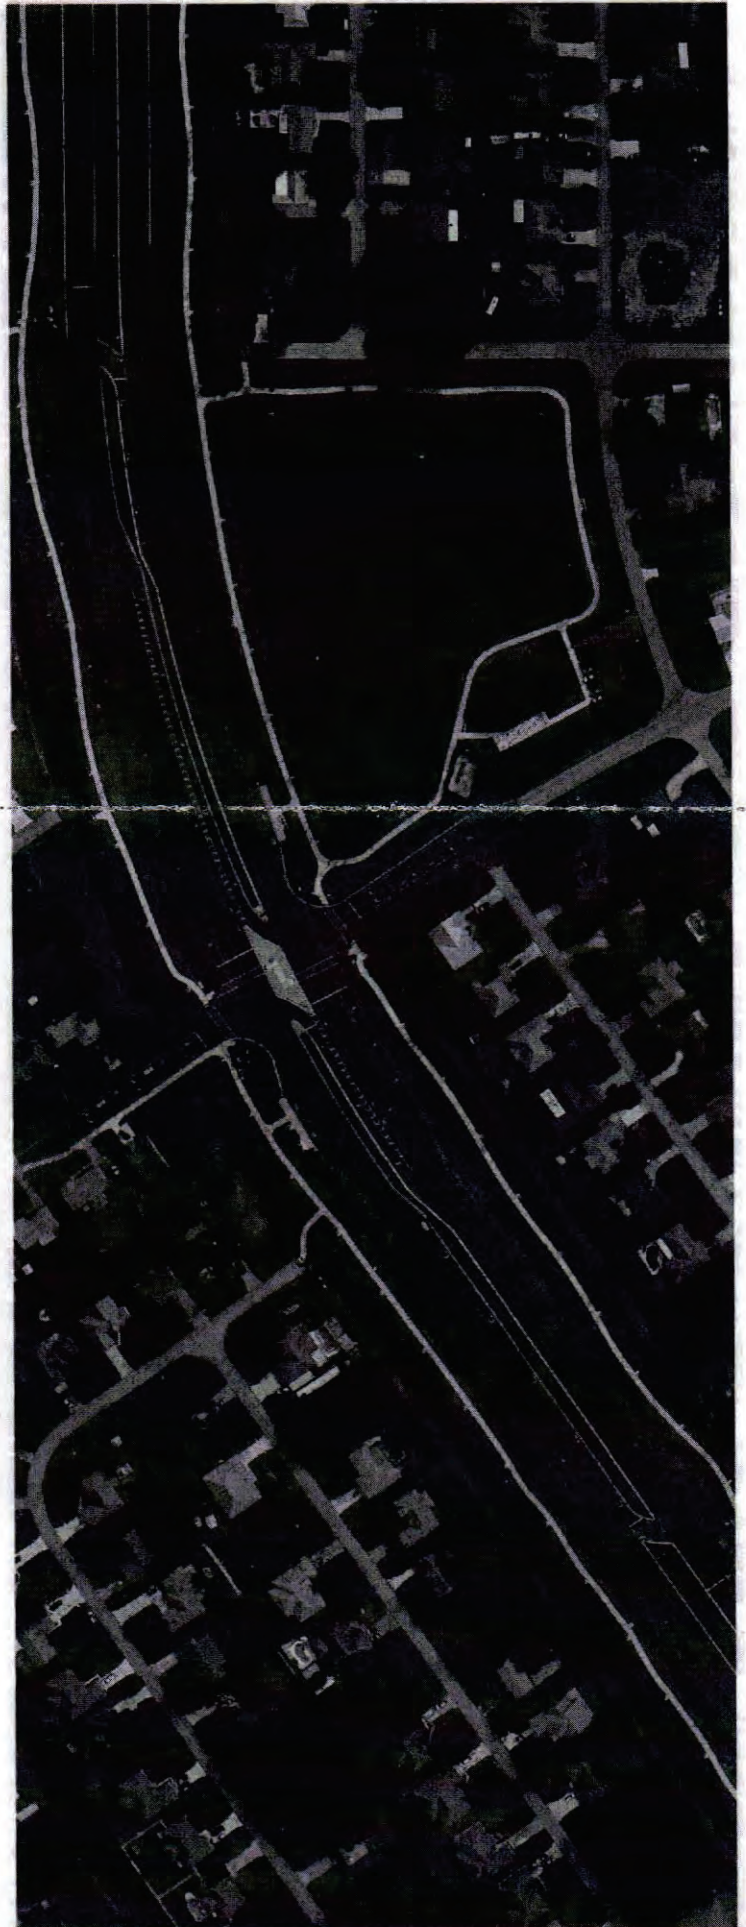

Chapter 6: Turn Lanes and U-Turns

6.1 Overview

For driveways, medians, and median openings, the placement and design of turn lanes and U-turns are critical to avoid potential traffic safety issues. For example, a median opening placed across a left-turn lane at an intersection could create conditions leading to a vehicular crash (See [Figure 27](#) or [Figure 28](#)). Locating these roadway openings is discussed in greater detail in [Chapter 2: Roadway Openings](#). This chapter will instead focus on where to locate and design turn lanes and U-turns and how they relate to driveways, medians, and median openings.

6.2 Exclusive Right-Turn Lanes


At driveways and intersections, an exclusive right-turn lane separates vehicles that are slowing or stopped to turn from the major road through traffic lanes. This separation minimizes turn-related collisions and eliminates unnecessary delay to through vehicles. Exclusive right-turn lanes are useful where a combination of high roadway speeds, and high right-turn volumes into a driveway are expected. Congestion on the roadway may also be a good reason to use an exclusive right-turn lane. If properly built, they remove the turning vehicle from the through lanes, thereby decreasing the operational and safety impact of right turning vehicles on the through traffic.

It is also important to consider potential pedestrian conflicts since the addition of a right-turn lane increases the crossing distance, time, and exposure for pedestrians. A well-designed right-turn lane can help to reduce pedestrian conflicts by slowing vehicle speeds, increasing pedestrian visibility, and reducing pedestrian exposure with a pedestrian refuge area.

6.2.1 When to Consider Exclusive Right-Turn Lanes

There are instances when adding an exclusive right-turn lane for unsignalized driveways and intersections is beneficial to traffic operations and safety. [Figure 74](#) provides guidance for two-lane and four-lane roadways based on the speed limit of the major roadway, major roadway approach volume, and how many right turns occur per hour. These recommendations are based primarily on the research done in [NCHRP Report 457, Evaluating Intersection Improvements: An Engineering Study Guide, Chapter 2 – Add a Right-Turn Bay on the Major Road](#).

Figure 74 | Recommended Guidelines for Exclusive Right-Turn Lanes to Unsignalized Driveway/Intersection

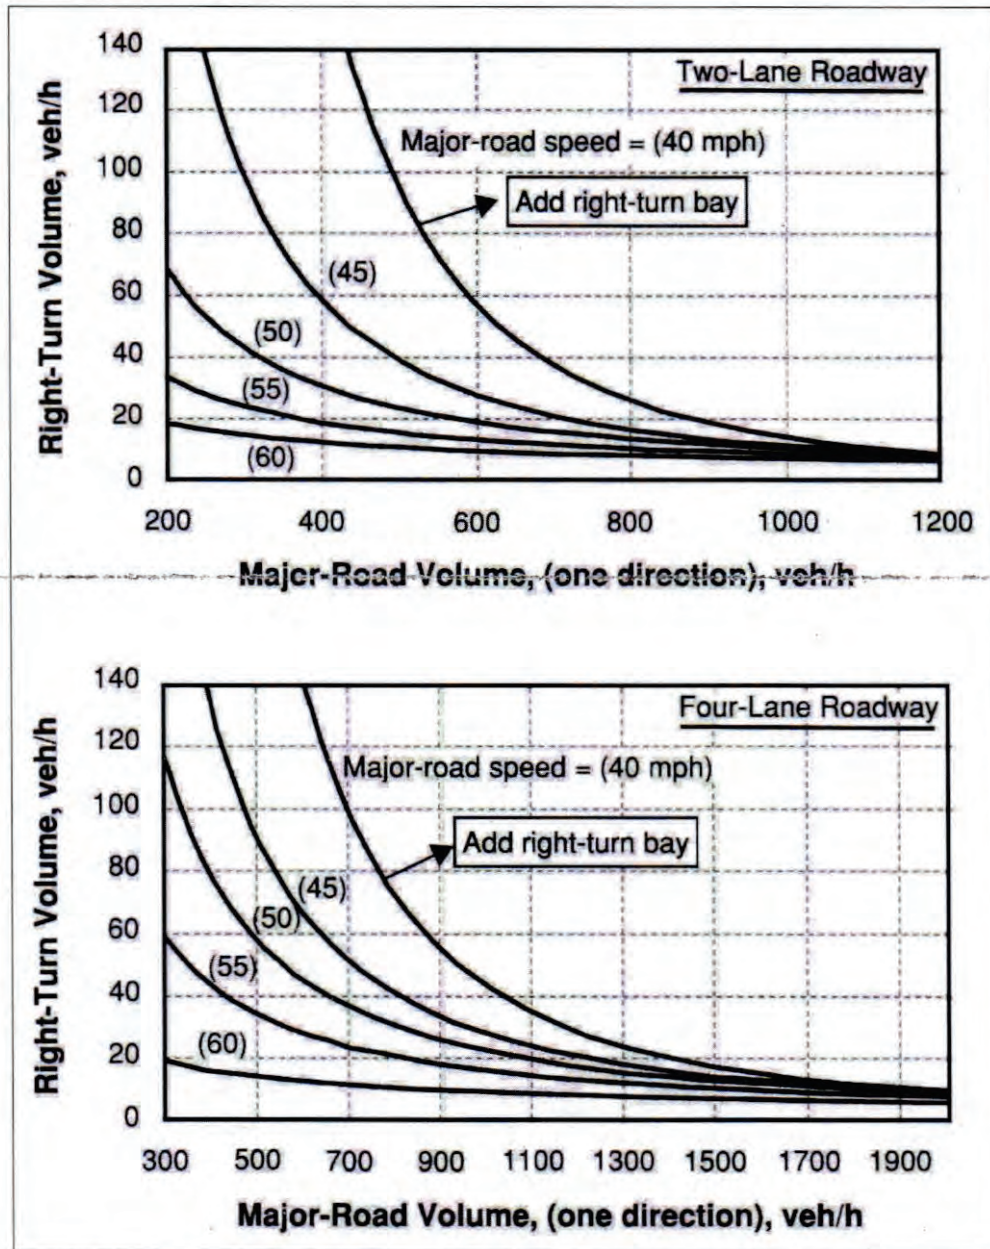

Source: [NCHRP Report 457](#), *TDOT Highway System Access Manual*

Here are some additional situations when adding an exclusive right-turn lane may be required:

- Facilities having a high volume of buses, trucks, or trailers (2 or 3 per hour), including:
 - Trucking facilities (or other locations that have a high volume of large vehicle traffic such as water ports, train stations, etc.)
 - Recreational facilities attracting boats, trailers, and other large recreation vehicles
 - Transit facilities
 - School driveways to drop-off and pick-up areas
- Poor internal site design of a driveway facility causing potential backups in the through lanes
- Heavier than normal peak flows on the main roadway
- Very high operating speeds (such as 55 mph or above) and in rural locations where turns are not expected by through drivers
- Highways with curves or hills where sight distance is impacted
- Gated entrances
- Crash experience, especially rear end collisions
- Intersections or driveways just after signalized intersections where acceleration or driver expectancy would make a separate right-turn lane desirable
- Severe skewed angle of intersection requiring right-turn vehicle to slow greatly

6.2.2 When Not to Consider Exclusive Right-Turn Lanes

- Dense or built-out corridors with limited space
- Right-turn lane that would negatively impact pedestrians or bicyclists
- Vehicular movements from driveways or median openings that cross the right-turn lane resulting in multiple threat crashes
- Context classifications C2T, C4, C5, or C6

6.2.3 Exclusive Right-Turn Lane Design

For information on exclusive right-turn lane design, refer to *FDM 212 - Intersections* and *Standard Plans, Index 711-001*. The FDM states that "Right-turn lane tapers and lengths are identical to left-turn lanes under stop control conditions. Right-turn lane tapers and lengths are site-specific for free-flow or yield conditions." Sheet 11 of Standard Plans, Index 711-001 provides requirements for clearance distance, brake to stop distance and deceleration distance by design speed for both curbed and uncurbed roadways. **Section 3.1.2: Median Opening Failures** provides discussion on the various parameters used in turn lane design such as decision distance, stopping distance, etc.

6.2.4 Important Considerations

Right-Turn Channelization

Where right-turn exiting channelization is used, be careful to provide a traffic entry angle that is easy for the exiting driver to negotiate while trying to enter traffic. **Figure 75** illustrates how driver head turn angles between 120°-125° (Tighter Angle) are more comfortable than the 145°-150° (Wide Angle) associated with more traditional designs. The tighter angle also encourages drivers to slow down, which provides more time for a thorough scan for conflicts.

Figure 77 | Raised Crosswalk at Channelized Right Turn



Source: *City of Los Angeles Supplemental Street Design Guide*

6.3 Exclusive Left-Turn Lanes

While some principles for right-turn lanes apply to left-turn lanes, there are inherent differences between them.

6.3.1 When Exclusive Left-Turn Lanes are Beneficial

There are several situations when a left-turn lane should be built on the roadway. For example, if on a multilane roadway and there is a median opening that is serving a driveway, there should be a left-turn lane to allow for vehicles to move safely out the way of the through traffic. Exclusive left-turn lanes should be considered at any location serving the public, especially on curves and where speeds are in excess of 45 mph. The *AASHTO Green Book* contains guidance on this issue. However, the guidelines were developed based on delay rather than crash avoidance. Safety is the main reason behind exclusive left-turn lanes.

6.3.2 When to Consider Exclusive Left-Turn Lanes at Unsignalized Intersections and Driveways

Left-turn lane warrants at unsignalized intersections and driveways were included in *NCHRP Report 745, Left-Turn Accommodations at Unsignalized Intersections*. The recommended left-turn lane warrants are provided for the following roadway facilities.

- Rural, two-lane highways (*Figure 78*)
- Rural, four-lane highways (*Figure 79*)
- Urban and suburban roadways (*Figure 80*)

Alternatively, the left-turn warrants based on *NCHRP Report 457*, (See *Figure 81*) can be used if it is found to be more appropriate and reasonable for a local condition. Engineering judgment should be used when deciding between the NCHRP 745, and NCHRP 457 guidelines.

Figure 78 | Left-Turn Lane Warrants for Two-Lane Rural Roadways (Unsignalized)

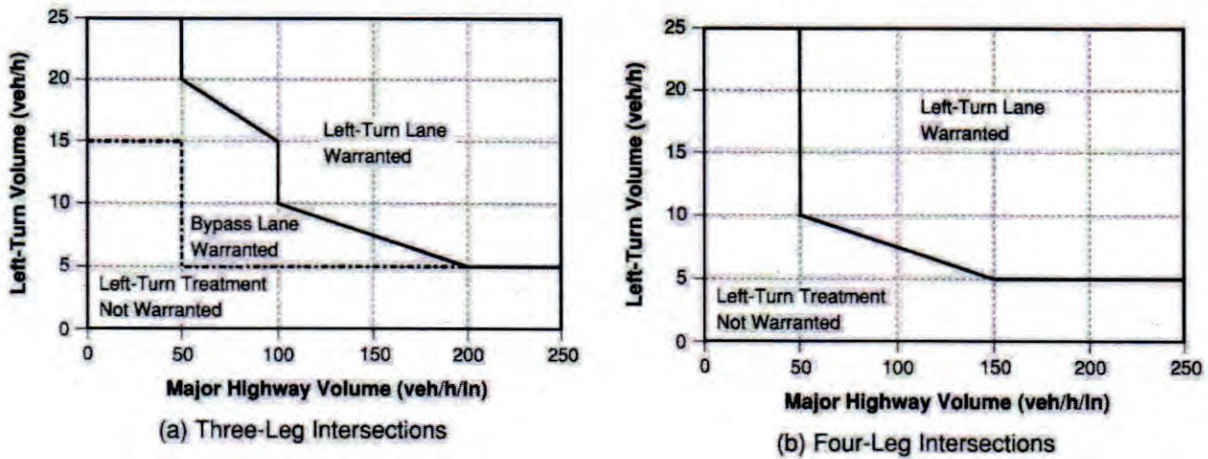


Figure 79 | Left-Turn Lane Warrants for Four-Lane Rural Roadways (Unsignalized)



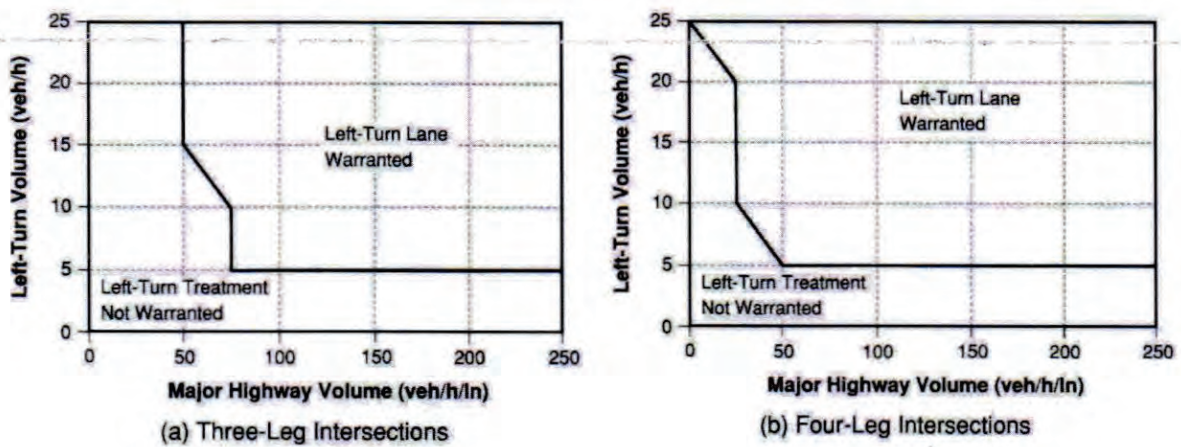


Figure 80 | Left-Turn Lane Warrants for Urban and Suburban Arterials

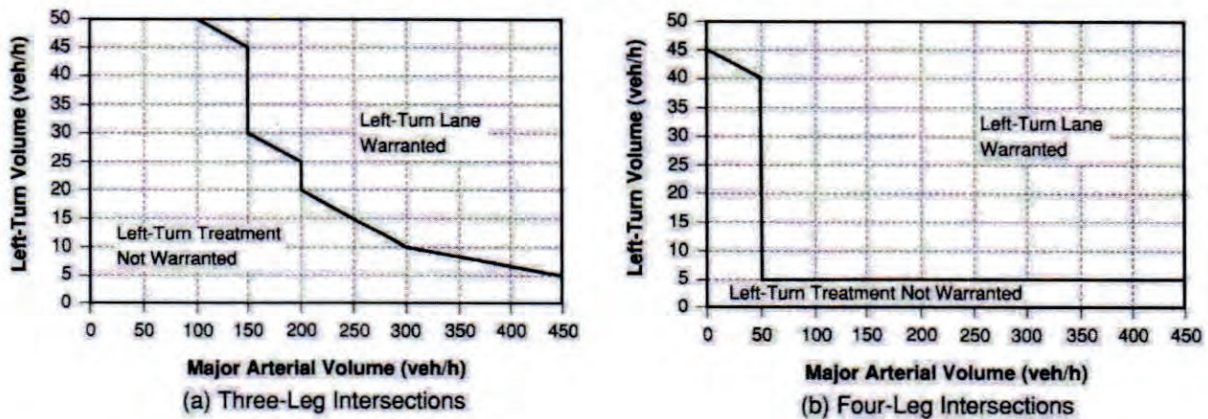

Source: NCHRP Report 745



Figure 81 | Left-Turn Lane Warrants (Unsignalized Intersections) – Alternate Method

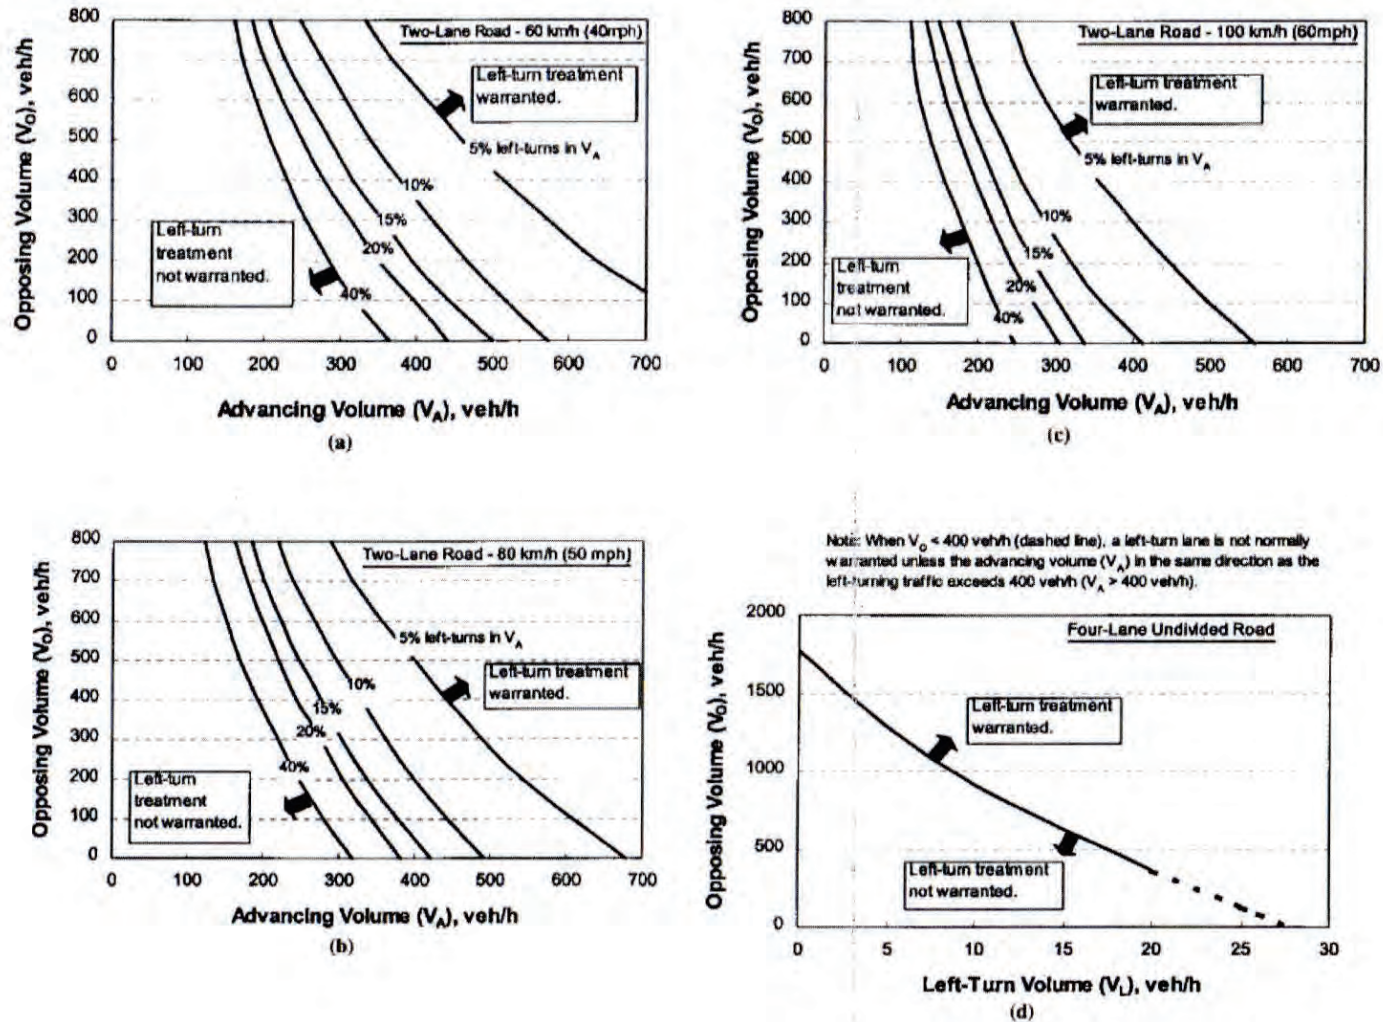

Source: NCHRP Report 457

APPENDIX
FDOT DESIGN MANUAL 212-1

MEDIAN TURN LANES MINIMUM DECELERATION LENGTHS

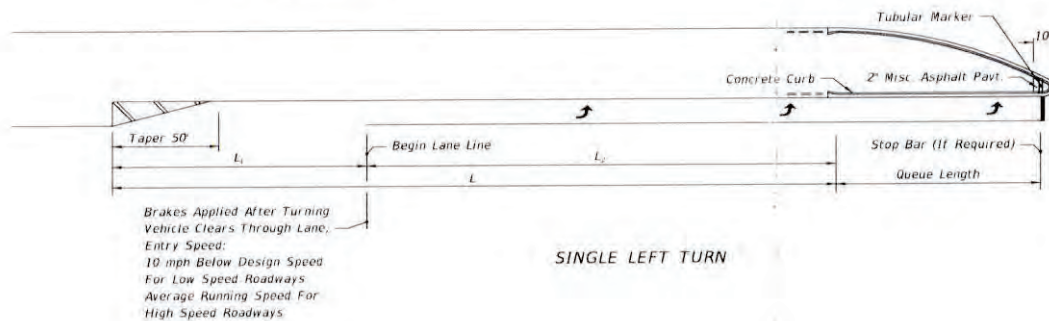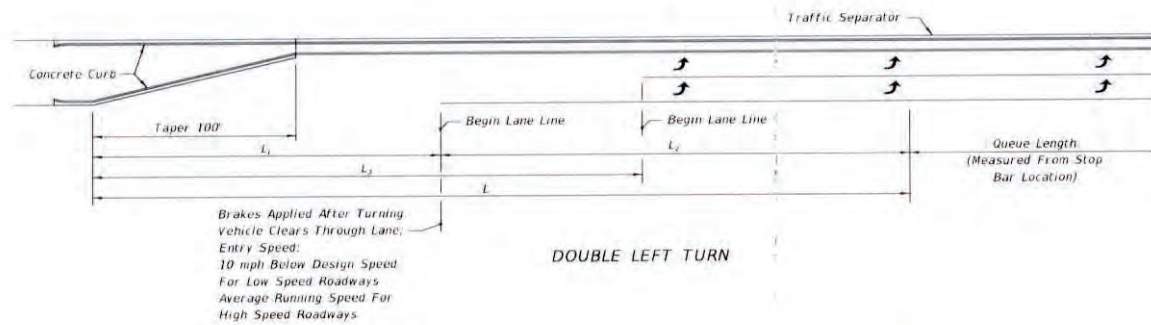

MEDIAN TURN LANES					
Design Speed (mph)	Entry Speed (mph)	Clearance Distance L_1 (ft.)	Brake To Stop Distance L_2 (ft.)	Total Decel. Distance L (ft.)	Clearance Distance L_1 (ft.)
25	15	70	25	95	90
30	20	70	50	120	100
35	25	70	75	145	110
40	30	80	75	155	120
45	35	85	100	185	135
50	44	105	185	290	160
55	48	125	225	350	195
60	52	145	260	405	230
65	55	170	290	460	270
70	58	200	325	525	300

NOTE:

- 1) For C3 Context Classification roadways with Design Speeds of 50 mph, the following values may be used under constrained conditions:
 - Entry Speed of 40 mph
 - Brake to stop distance (L_2) of 135 ft.
 - Total deceleration distance (L) of 240 ft.
- 2) For RRR Projects with Design Speeds of 50 mph and Entry Speeds of 40 mph, existing brake to stop distances (L_2) of 135 ft. and total deceleration distances (L) of 240 ft. may be retained.

NOT TO SCALE

**EXHIBIT 212-1
01/01/2024**

APPENDIX

FDOT GENERALIZED SERVICE VOLUME TABLES

C3C & C3R

Motor Vehicle Arterial Generalized Service Volume Tables

Peak Hour Directional

Peak Hour Two-Way

AADT



	B	C	D	E
1 Lane	*	760	1,070	**
2 Lane	*	1,520	1,810	**
3 Lane	*	2,360	2,680	**
4 Lane	*	3,170	3,180	**

	B	C	D	E
2 Lane	*	1,380	1,950	**
4 Lane	*	2,760	3,290	**
6 Lane	*	4,290	4,870	**
8 Lane	*	5,760	5,780	**

	B	C	D	E
2 Lane	*	15,300	21,700	**
4 Lane	*	30,700	36,600	**
6 Lane	*	47,700	54,100	**
8 Lane	*	64,000	64,200	**



	B	C	D	E
1 Lane	*	970	1,110	**
2 Lane	*	1,700	1,850	**
3 Lane	*	2,620	2,730	**

	B	C	D	E
2 Lane	*	1,760	2,020	**
4 Lane	*	3,090	3,360	**
6 Lane	*	4,760	4,960	**

	B	C	D	E
2 Lane	*	19,600	22,400	**
4 Lane	*	34,300	37,300	**
6 Lane	*	52,900	55,100	**

Adjustment Factors

The peak hour directional service volumes should be adjusted by multiplying by 1.2 for one-way facilities.
 The AADT service volumes should be adjusted by multiplying 0.6 for one way facilities.
 2 Lane Divided Roadway with an Exclusive Left Turn Lane(s): Multiply by 1.05
 2 lane Undivided Roadway with No Exclusive Left Turn Lane(s): Multiply by 0.80

Exclusive right turn lane(s): Multiply by 1.05
 Multilane Undivided Roadway with an Exclusive Left Turn Lane(s): Multiply by 0.95
 Multilane Roadway with No Exclusive Left Turn Lane(s): Multiply by 0.75
 Non-Signalized Roadway: Multiply by 0.90

This table does not constitute a standard and should be used only for general planning applications. The table should not be used for corridor or intersection design, where more refined techniques exist.

* Cannot be achieved using table input value defaults.

** Not applicable for that level of service letter grade. For the automobile mode, volumes greater than level of service D become F because intersection capacities have been reached.

C3C & C3R

Motor Vehicle Arterial Generalized Service Volume Tables

Input Parameters

Roadway Characteristics

	C3C	C3R
Number of Lanes (one direction)	1-4	1-3
Posted Speed (mph)	45	45
Facility Length (miles)	3.98	2.57

Traffic Characteristics

	C3C		C3R	
Planning Analysis Hour Factor (K)	0.09		0.09	
Directional Distribution Factor (D)	0.55		0.55	
Peak Hour Factor (PHF)	0.95		0.92	
Base Saturation Flow Rate	1,950		1,950	
Heavy Vehicle Percent (%)	4		4	
Lane Width	12		12	
Median Type	Non Restrictive (1 lane)	Restrictive (2,3,4 lanes)	Non Restrictive (1 lane)	Restrictive (2,3 lanes)
Roadway Edge Type	Curbed		Flush	
On-Street Parking	None		None	

Control Characteristics

	C3C		C3R
Cycle Length	160		190
Major Street Through g/c	0.5 (1,2,3 lanes)	0.45 (4 lanes)	0.5
Yellow Change Interval	5.1		5.1
Red Change Interval	2		2
Number of Signals	10		5