# INTEGRITY LAND SOLUTIONS GROUP, INC.

Professional Land Surveying & Mapping 12345 Centralia Rd./ P.O. Box 6890 Spring Hill, FL 34611

Phone: (352) 428-2351

Email: ILSG@tampabay.rr.com

- LISA TABBERT

WORK ORDER: 25 - 42 MAP DATE: 4/15/2025 SECTION: 33

TOWNSHIP: 21 S RANGE: 20 E

CERTIFIED TO THE FOLLOWING ONLY: PARCEL KEY: 401238


Physical Address: @ Pineda Drive

# MAP OF SURVEY, BOUNDARY SURVEY

Purpose of Survey: A Boundary Survey for Reconfigure with Descriptions for Submittal.

PARENT TRACT PARCEL O.R. BOOK 3346 PAGE 1384

Parcel 4: parcel No. 187 of an unrecorded subdi cribed as follows: Commencing at the NE corner of the NW 1/4 of Section 33, Township 21 South, Range 20 East, Hernando County, Florida, go thence N89°39'40"W, along the North line of said NW 1/4, a distance of 331.75 feet to t POINT OF BEGINNING; continue thence N89°39'40"W a distance of 331.74 feet, ence S00°33'28"W a distance of 568.32 feet, thence S89°31'17"E, a distance of 331.96 feet, thence N00°32'12"E, a distance of 569.12 feet to the Point of Beginning. EXCEPTING therefrom the Westerly and Southerly 25.00 feet thereof to be used for road right-of-way purposes.

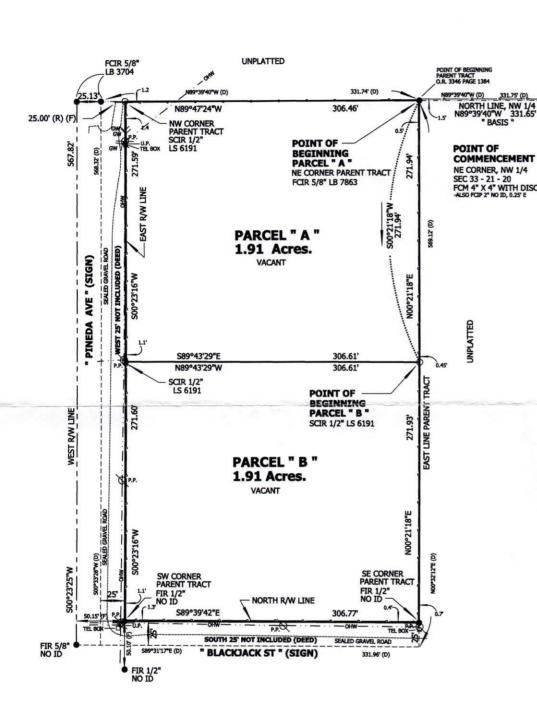



PARCEL " A "

Commence at the NE corner of the NW 1/4 of Section 33, Township 21 South, Range 20 East, Hernando County, Florida, said point being monumented with a 4" x 4" concrete marker with disc not legible. Go thence along the North line of the NW 1/4 of said Section 33, N89°39'40"W (Bearing Basis for this Description) a distance of 331.65 feet (formerly 331.75 feet) to the NE corner of the parent tract parcel as described in O.R. Book 3346 and page 1384 inclusive of the Public Records of Hernando County, Florida, said corner being monumented with a capped 5/8" iron rod stamped LB7863; continue thence along the said North line, N89°47'24"W (formerly N89°39'40"W) a distance of 306.46 feet to the NW corner of said parent tract parcel and a point on the East right-of-way line of a road, as it is now established, also known as Pineda Avenue; thence run along the said East right-of-way line, S00°23'16"W a distance of 271.59 feet to a point; thence run S89°43'29"E a distance of 306.61 feet to a point on the East line of said parent tract parcel; thence run along the said East line, N00°21'18"E (formerly N00°32'12"E) a distance of 271.94 feet to the Point of

## PARCEL " B "

Commence at the NE corner of the NW 1/4 of Section 33, Township 21 South, Range 20 East, Hernando County, Florida, said point being monumented with a 4" x 4" concrete marker with disc not legible. Go thence along the North line of the NW 1/4 of said Section 33, N89°39'40"W (Bearing Basis for this Description) a distance of 331.65 feet (formerly 331.75 feet) to the NE corner of the parent tract parcel as described in O.R. Book 3346 and page 1384 inclusive of the Public Records of Hernando County, Florida, said corner being monumented with a capped 5/8" iron rod stamped LB7863; thence run along the East line of said parent tract parcel, S00°21'18"W (formerly 500°32'12"W) a distance of 271.94 feet to the POINT OF BEGINNING; thence run N89°43'29"W a distance of 306.61 feet to a point on the East right-of-way line of a road as it is now established, also known as Pineda Avenue; thence run along the said East right-of-way line, S00°23'16"W a distance of 271.60 feet to the SW corner of the said parent tract parcel and a 1/2" iron rod unnumbered; thence run along the South line of said parent tract parcel and the North right-of-way line of a road as it is now established, also known as Blackjack Street, S89°39'42"E a distance of 306.77 feet to the SE corner of the said parent tract parcel and a 1/2" iron rod unnumbered; thence run along the East line of said parent tract parcel, N00°21'18" E (formerly N00°32'12"E ) a distance of 271.93 feet to the Point of Beginning.

## Abbreviations & Symbol Legend

E - East
F - Derived from Field Measuren
FCIP - Found Capped Iron Pipe
FCIR - Found Capped Iron Rod
FCM - Found Iron Rod
GW - Guy Wire
ID - Identification

LB - Land Survey LS - Land Survey

OHW - Overhead Wire(s)
PP - Power Pole
R - Record Plat or Deed
SCIR - Set Capped Iron Rod
SE - Southeast
SEC - Section
SW - Southwest
TEL - Telephone
UP - Utility Pole O - Set Monument

- Found Monument
- Found Monument

THIS CERTIFIES THAT A SURVEY OF THE PROPERTY DESCRIBED HEREON, WAS MADE UNDER MY SUPERVISION AND THAT THE SURVEY MEETS THE STANDARDS OF PRACTICE SET FORTH BY THE FLORIDA BOARD OF PROFESSIONAL SURVEYORS AND MAPPERS IN CHAPTER 5J-17 FLORIDA ADMINISTRATIVE CODE, PURSUANT TO SECTION 472.027, FLORIDA STATUTES, AND THAT THE MAP HEREON IS A TRUE AND ACCURATE REPRESENTATION THEREOF, TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Chris T. Gordon 16:49:48 -04'00'

Digitally signed by Chris T. Gordon Date: 2025.04.16



DATE OF LAST FIELD ACQUISITION:

CHRIS T. GORDON, Professional Surveyor & Mapper Florida Registration # 6191 Integrity Land Solutions Group, Inc. LB #8065 4/14/2025

### Surveyor Notes

1. Survey based on the description furnished by the Client and thout benefit of a title search.

3. Underground utilities and subsurface improvements not located

unless otherwise shown hereon.

4. There are no visible encroachments unless otherwise sho

5. Ownership of fences located on or near property line(s) was

The measured distance from existing improvements to designated features, such as, but not limited to, property lines

and/or other lines, or other edisting improvements, are perpendicular unless otherwise shown hereon.

7. Gutters, overhangs, underground foundations and irrigation

The property shown hereon may be subject to Rules, Regulations, Ordinances and/or Jurisdictions of Local, State, Ordinances and/or the limits of said Jurisdictions were not Solution of the same of the sa

10. Flood zone Information (Note #9) Is taken from State and local governing agency's website portals. The source and accuracy of this data was not determined by this Surveyor. Reliance on this flood zone Information is at the sole risk of those to whom it is

11. Bearings shown hereon are based on the occupied North line of the NW 1/4 Section 33 as referenced hereon. Deed bearing: N89°39'40'W is assumed by this Surveyor designated hereon by the graphical enty "BASIS" at a forestated bearing. North arrow is oriented per stated deed bearing.

 NOT USED
 Subject property may be subject to Reservations, Restrictions, ents of Record and not of Record that an accurate title and/or Ease and/or Easements or Record and not or Record that an accurate to search may disclose. Determination was not made by this Surveyor for the aforementioned and shall not be held liable in any way for damages caused as a result.

 Held monuments found in place set by previous surveyors unless otherwise shown hereon. 15. NOT USED

16. Any reproduction or photocopy of this map of survey, partially or in its entirety, is prohibited without the written consent and permission of Integrity Land Solutions Group, Inc., and in such cases shall be considered not valid and of uncertified information only. In such case, reliance upon information is at the sole risk of user and Integrity Land Solutions Group, Inc., and/or its affiliates, will not be held liable in any way.

Solutions Group, Arc., end, or los defined any way.

17. This map shall not be used for any other purposes than what it was created for and shall be considered in such case, general information only and not valid. This map of survey is not to be used for design and/or construction purposes without the expressed permission of Integrity Land Solutions Group, Inc., which reserves the right to deny any additional use of this map other than the purpose for which it was created. THIS IS NOT

18. Certifying Surveyor accepts no responsibility for right of way, easement restrictions or other matters affecting title to land surveyed other than those recited in the current deed or instruments of records furnished by the client and/or their agents.

 This map of survey is solely for the benefit of those named in the certification box shown hereon and is NOT TRANSFERABLE. Integrity Land Solutions Group, Inc., assumes no responsibility for any and all damages caused as a result of using this map contrary to above stated.

20. This map is not for the purposes of construction and/or design.

UNLESS IT BEARS THE SIGNATURE AND THE ORIGINAL RAISED SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER, THIS DRAWING, SKETCH, PLAT, OR MAP IS FOR INFORMATIONAL PURPOSES ONLY AND IS NOT VALID. LAST PLOTTED: 4/17/2025 Field Book: 51 Page(s): 17 OFFICE USE ONLY: C:\SURVEYS\2025DWG\00-25\25-42\25-42.DWG Drawn By: CTG Checked By: CTG

### PARCEL " A "

Commence at the NE corner of the NW 1/4 of Section 33, Township 21 South, Range 20 East, Hernando County, Florida, said point being monumented with a 4" x 4" concrete marker with disc not legible. Go thence along the North line of the NW 1/4 of said Section 33, N89°39'40"W (Bearing Basis for this Description) a distance of 331.65 feet (formerly 331.75 feet) to the NE corner of the parent tract parcel as described in O.R. Book 3346 and page 1384 inclusive of the Public Records of Hernando County, Florida, said corner being monumented with a capped 5/8" iron rod stamped LB7863; continue thence along the said North line, N89°47'24"W (formerly N89°39'40"W) a distance of 306.46 feet to the NW corner of said parent tract parcel and a point on the East right-of-way line of a road, as it is now established, also known as Pineda Avenue; thence run along the said East right-of-way line, S00°23'16"W a distance of 271.59 feet to a point; thence run S89°43'29"E a distance of 306.61 feet to a point on the East line of said parent tract parcel; thence run along the said East line, N00°21'18"E (formerly N00°32'12"E) a distance of 271.94 feet to the Point of Beginning.

#### PARCEL "B"

Commence at the NE corner of the NW 1/4 of Section 33, Township 21 South, Range 20 East, Hernando County, Florida, said point being monumented with a 4" x 4" concrete marker with disc not legible. Go thence along the North line of the NW 1/4 of said Section 33, N89°39'40"W (Bearing Basis for this Description) a distance of 331.65 feet (formerly 331.75 feet) to the NE corner of the parent tract parcel as described in O.R. Book 3346 and page 1384 inclusive of the Public Records of Hernando County, Florida, said corner being monumented with a capped 5/8" iron rod stamped LB7863; thence run along the East line of said parent tract parcel, S00°21'18"W (formerly S00°32'12"W) a distance of 271.94 feet to the POINT OF BEGINNING; thence run N89°43'29"W a distance of 306.61 feet to a point on the East right-of-way line of a road as it is now established, also known as Pineda Avenue; thence run along the said East right-of-way line. S00°23'16"W a distance of 271.60 feet to the SW corner of the said parent tract parcel and a 1/2" iron rod unnumbered; thence run along the South line of said parent tract parcel and the North right-of-way line of a road as it is now established, also known as Blackjack Street, S89°39'42"E a distance of 306.77 feet to the SE corner of the said parent tract parcel and a 1/2" iron rod unnumbered; thence run along the East line of said parent tract parcel, N00°21'18" E (formerly N00°32'12"E) a distance of 271.93 feet to the Point of Beginning.