



PROCUREMENT DEPARTMENT

15470 FLIGHT PATH DRIVE ♦ BROOKSVILLE, FLORIDA 34604
P 352.754.4020 ♦ F 352.754.4199 ♦ W www.HernandoCounty.us

AMENDMENT NO. ONE (1)

TO

CONTRACT NO. 23-C00326/AP

FOR

RECONSTRUCTION AND PAVING OF ROYAL HIGHLANDS & RIDGE MANOR ROADS

The following changes are hereby made a part of the Contract Documents for the **Contract No. 23-C00326/AP – Reconstruction and Paving of Royal Highlands & Ridge Manor Roads**, located in Hernando County, as fully and completely as if the same were fully set forth therein:

1. The following services are hereby revised to the above referenced Contract:

A. Add Section D Penn State Road:

SECTION D - PENN STATE ROAD					
Line Item	Description	Unit of Measure	Quantity	Unit Cost	Total
1	MOBILIZATION, DEMOBILIZATION, SPECIAL PROVISIONS, NPDES N.O.I. and NPDES N.O.T.	LS	1	\$15,000.00	\$15,000.00
2	MAINTENANCE OF TRAFFIC	LS	1	\$5,000.00	\$5,000.00
3	CONSTRUCTION SURVEY IDENTIFICATION (Florida Registered Surveyor)	LS	1	\$7,500.00	\$7,500.00
4	GOPHER TORTOISE SURVEY, MAPPING PERMITTING	LS	1	\$2,000.00	\$2,000.00
5	PREVENTION, CONTROL AND ABATEMENT OF EROSION & WATER POLLUTION, SILT FENCE (F&I) (Removal)	LF	1083	\$2.00	\$2,166.00
6	CLEARING and GRUBBING (Includes Sign Relocating, Saw-cutting, Asphalt Removal, Concrete Removal, Windrow Removal, Pipe Removal)	LS	1	\$50,000.00	\$50,000.00
7	MAILBOX / PAPERBOX ASSEMBLIES (F & I) (Includes House Numbers Both Sides)	EA	2	\$250.00	\$500.00
8	MAILBOX / PAPERBOX ASSEMBLIES (Remove, Relocate & Reset)	EA	9	\$150.00	\$1,350.00
9	TYPE "B" STABILIZATION (23' WIDE)	SY	7810	\$5.00	\$39,050.00
10	BORROW EXCAVATION - CLEAN IMPORT FILL MATERIAL (Truck Ticket Measure) (Field Determined)	CY	36	\$20.00	\$720.00

11	EXCAVATION (21' ROAD BOX) (3" DEEP)	CY	601	\$20.00	\$12,020.00
12	LIMEROCK - NEW MATERIAL, 6" (MIN) (COMPACTED) (LBR 100) (w/ PRIME @ 0.10 Gal/Sy) (Truck Ticket Measure)	TN	2092	\$45.00	\$94,140.00
13	SP12.5 ASPHALT (1-3/4") (TRAFFIC "C")	SY	6890	\$17.50	\$120,575.00
14	MILLINGS, D/W Tie-Ins, Side Streets (Field Determined)	TNS	36	\$75.00	\$2,700.00
15	PERFORMANCE TURF, 4' SOD, BAHIA	SY	2624	\$4.50	\$11,808.00
16	PERFORMANCE TURF, 4' SOD, FLORITAM	SY	500	\$5.50	\$2,750.00
17	TORTOISE EXCLUSIONARY SILT FENCE (F&I) (Removal)	LF	300	\$5.00	\$1,500.00
18	GOPHER TORTOISE BURROWS EXCAVATIONS	EA	3	\$750.00	\$2,250.00
19	GOPHER TORTOISE RELOCATIONS	EA	3	\$6,500.00	\$19,500.00
20	4" PAINT, DBL SOLID STRIPE, YELLOW	LF	120	\$10.00	\$1,200.00
21	20" PAINT, SOLID STRIPE, WHITE	LF	112	\$20.00	\$2,240.00
22	6" THERMOPLASTIC, DBL SOLID STRIPE, YELLOW	LF	120	\$15.00	\$1,800.00
23	24" THERMOPLASTIC, SOLID STRIPE, WHITE	LF	112	\$25.00	\$2,800.00
Total					\$398,569.00

B. Add Section E Scaup Duck Avenue:

SECTION E - SCAUP DUCK AVE					
Line Item	Description	Unit of Measure	Quantity	Unit Cost	Total
1	MOBILIZATION, DEMOBILIZATION, SPECIAL PROVISIONS, NPDES N.O.I. and NPDES N.O.T.	LS	1	\$15,000.00	\$15,000.00
2	MAINTENANCE OF TRAFFIC	LS	1	\$5,000.00	\$5,000.00
3	CONSTRUCTION SURVEY IDENTIFICATION (Florida Registered Surveyor)	LS	1	\$7,500.00	\$7,500.00
4	GOPHER TORTOISE SURVEY, MAPPING PERMITTING	LS	1	\$2,000.00	\$2,000.00
5	PREVENTION, CONTROL AND ABATEMENT OF EROSION & WATER POLLUTION, SILT FENCE (F&I) (Removal)	LF	840	\$2.00	\$1,680.00
6	CLEARING and GRUBBING (Includes Sign Relocating, Saw-cutting, Asphalt Removal, Concrete Removal, Windrow Removal)	LS	1	\$50,000.00	\$50,000.00
7	MAILBOX / PAPERBOX ASSEMBLIES (F & I) (includes House Numbers Both Sides)	EA	2	\$250.00	\$500.00
8	MAILBOX / PAPERBOX ASSEMBLIES (Remove, Relocate & Reset)	EA	9	\$150.00	\$1,350.00
9	TYPE "B" STABILIZATION (23' WIDE)	SY	7929	\$5.00	\$39,645.00
10	BORROW EXCAVATION - CLEAN IMPORT FILL MATERIAL (Truck Ticket Measure) (Field Determined)	CY	36	\$20.00	\$720.00

11	EXCAVATION (21' ROAD BOX) (3" DEEP)	CY	608	\$20.00	\$12,160.00
	LIMEROCK - NEW MATERIAL, 6" (MIN) (COMPACTED) (LBR 100) (w/ PRIME @ 0.10 Gal/Sy) (Truck Ticket Measure)				
12		TN	2116	\$45.00	\$95,220.00
13	SP12.5 ASPHALT (1-3/4") (TRAFFIC "C")	SY	6956	\$17.50	\$121,730.00
14	MILLINGS, D/W Tie-Ins, Side Streets (Field Determined)	TNS	36	\$75.00	\$2,700.00
15	PERFORMANCE TURF, 4' SOD, BAHIA	SY	2450	\$4.50	\$11,025.00
16	PERFORMANCE TURF, 4' SOD, FLORITAM	SY	500	\$5.50	\$2,750.00
17	TORTOISE EXCLUSIONARY SILT FENCE (F&I) (Removal)	LF	300	\$5.00	\$1,500.00
18	GOPHER TORTOISE BURROWS EXCAVATIONS	EA	3	\$750.00	\$2,250.00
19	GOPHER TORTOISE RELOCATIONS	EA	3	\$6,500.00	\$19,500.00
20	4" PAINT, DBL SOLID STRIPE, YELLOW	LF	60	\$10.00	\$600.00
21	20" PAINT, SOLID STRIPE, WHITE	LF	56	\$20.00	\$1,120.00
22	6" THERMOPLASTIC, DBL SOLID STRIPE, YELLOW	LF	60	\$15.00	\$900.00
23	24" THERMOPLASTIC, SOLID STRIPE, WHITE	LF	56	\$25.00	\$1,400.00
	Total				\$396,250.00

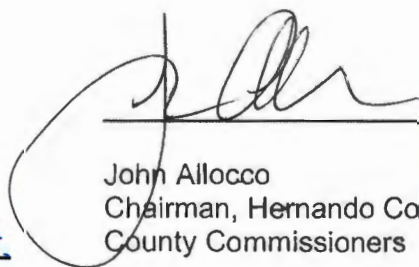
2. All other terms and conditions shall remain the same.

B.R.W. Contracting, Inc.

BOARD OF COUNTY COMMISSIONERS
HERNANDO COUNTY


Authorized Signature

Print Name Ignace M. Petracatelli, Jr.


John Allocco
Chairman, Hernando County Board of
County Commissioners



Date Issued: 11/07/23

APPROVED AS TO FORM AND
LEGAL SUFFICIENCY:

By: Melissa Tartaglia
County Attorney's Office