



## DEPARTMENT OF PURCHASING AND CONTRACTS

15470 FLIGHT PATH DRIVE ♦ BROOKSVILLE, FLORIDA 34604

P 352.754.4020 ♦ F 352.754.4199 ♦ W [www.HernandoCounty.us](http://www.HernandoCounty.us)

### AMENDMENT NO. ONE (1)

TO

**CONTRACT NO. 20-TF0023/TPR**

FOR

**EMERGENCY DEBRIS REMOVAL**

The following additions are hereby made a part of the Contract Documents for the **CONTRACT NO. 20-TF0023/TPR – EMERGENCY DEBRIS REMOVAL**, located in Hernando County, as fully and completely as if the same were fully set forth therein:

1. The following services are hereby added to the above referenced Contract.

### **SECTION VI: SCOPE AND SPECIFICATIONS**

#### **96. CLEANUP AND REMOVAL OF PUTRESCENT DEBRIS**

##### **96.1. Offshore, Red Tide**

**96.1.1.** Two skimmer vessels will operate at predetermined but separate distances from shore. Each will remove debris from offshore waters. Once nets have filled, the vessel will transit to the offload site where the debris will be transferred to awaiting dumpsters via forklift.

**96.1.2.** Two separate 1000 foot sections of boom will be anchored, each day based on the latest data and observations including wind, currents, bloom concentrations and physical observations of debris. Skimmer vessel will run alongside of the boom to increase the efficiency of debris removal. Boom may be utilized to create a barrier that can be rapidly deployed to minimize the impact of a known debris field predicted to impact local waters and coastline.

**96.1.3.** More Offshore Skimmer Vessels can be Deployed consisting of:

**96.1.3.1.** One (1) Skimmer Boat

**96.1.3.2.** One (1) Captain

**96.1.3.3.** Two (2) Deckhands

**96.1.3.4.** Three (3) Rain Suit

**96.1.3.5.** Three (3) PVC Glove

**96.1.3.6.** Three (3) Leather Work Glove

**96.1.3.7.** Three (3) PVC Boots

**96.1.3.8.** One (1) Handtools

**96.1.3.9.** One (1) Hand Held Radio

**96.1.3.10.** Two (2) Dumpsters

## **96.2. Bay Clenaup, Red Tide**

**96.2.1.** Each skimmer vessel will work throughout the bay. Once the vessel's nets are full, a push boat with brage with assist excavator and dumpster will meet the skimmer vessel and debris will be transferred to awaiting dumpster. Once dumpster is at capacity, barge will transit to off loading area where the full dumpster will be taken off the barge and replaced with an empty dumpster.

**96.2.2.** Full dumpsters at the off-loading area shall be taken to the main landfill for emptying. Tipping Fees shall be reimbursed at actual costs. Costs for transport to and from the landfill shall be included in the roll off dumpster rate.

**96.2.3.** More Bay Skimmer Vessels can be Deployed consisting of:

- 96.2.3.1.** One (1) Skimmer Boat
- 96.2.3.2.** One (1) Captain
- 96.2.3.3.** Two (2) Deckhands
- 96.2.3.4.** Three (3) Rain Suit
- 96.2.3.5.** Three (3) PVC Glove
- 96.2.3.6.** Three (3) Leather Work Glove
- 96.2.3.7.** Three (3) PVC Boots
- 96.2.3.8.** One (1) Handtools
- 96.2.3.9.** One (1) Hand Held Radio
- 96.2.3.10.** Two (2) Dumpsters

## **96.3. Intercoastal and Canals, Red Tide**

**96.3.1.** Each Team for Skimming is based on 5 Square Miles of work area. Skimmer vessel will work throughout the affected area removing debris that will be bagged on the vessel. A work assistant boat will meet the skimmer vessel and debris bags will be transferred to it. Skimmer will continue operations while the work assist boat will transit filled debris bags to the off load site where it will be transferred via Forklift to awaiting dumpsters.

**96.3.2.** Full dumpsters at the off-loading area shall be taken to the main landfill for emptying. Tipping Fees shall be reimbursed at actual costs. Costs for transport to and from the landfill shall be included in the roll off dumpster rate.

**96.3.3.** More Intracoastal and Canal Skimmer Vessels can be Deployed consisting of:

- 96.3.3.1.** One (1) Skimmer Boat
- 96.3.3.2.** Two (2) Marine Operator
- 96.3.3.3.** One (1) Deckhand
- 96.3.3.4.** One (1) >14' Work Boat
- 96.3.3.5.** Three (3) Rain Suit
- 96.3.3.6.** Three (3) PVC Glove
- 96.3.3.7.** Three (3) Leather Work Glove



96.3.3.8. Three (3) PVC Boots

96.3.3.9. One (1) Handtools

96.3.3.10. Two (2) Hand Held Radios

96.3.3.11. Two (2) Dumpsters

2. All other terms and conditions shall remain the same.

**ADD PHASE II – COLLECTION, HAULING TO STAGING SITE AND REDUCTION**

**\*\*\* DRC Operations Manager and/or Superintendent from offshore tab should apply to one or all tabs but not duplicate costs as needed per tab.**

ITEM NO.	DESCRIPTION	TYPE	UNIT OF MEASURE	RATE
18a	Offshore, Red Tide			
18a1	DRC Operations Manager***	LABOR	HOURLY	112.50
18a2	DRC Superintendent***	LABOR	HOURLY	112.50
18a3	Supervisor with Vehicle	LABOR	HOURLY	90
18a4	Captain	LABOR	HOURLY	112.50
18a5	Deck Hand	LABOR	HOURLY	75
18a6	Marine Operator	LABOR	HOURLY	97.50
18a7	Admin Assistant	LABOR	HOURLY	60
18a8	Heavy Equipment Operator	LABOR	HOURLY	82.50
18a9	Tool Operator	LABOR	HOURLY	75
18a10	Laborer	LABOR	HOURLY	75
18a11	Hazmat Worker	LABOR	HOURLY	82.50
18a12	Mechanic with Truck and Tools	LABOR	HOURLY	120
18a13	<14' Work Boat	EQUIPMENT	DAY	150
18a14	>14' Work Boat	EQUIPMENT	DAY	300
18a15	Skimmer Boat	EQUIPMENT	HOURLY	262.50
18a16	Beach Rake with Tractor	EQUIPMENT	HOURLY	112.50
18a17	Boom	EQUIPMENT	PER FOOT/PER DAY	6
18a18	Barge 12x40	EQUIPMENT	HOURLY	300
18a19	Roll Off Dumpsters	EQUIPMENT	DAY	375
18a20	Roll Off Truck	EQUIPMENT	DAY	1125
18a21	ATV	EQUIPMENT	HAUL	60
18a22	Loader 2 YD	EQUIPMENT	HOURLY	217.50
18a23	Pickup Truck, ½ Ton Unmanned	EQUIPMENT	HOURLY	37.5
18a24	Vehicle Use-Pickup, Van, Car	EQUIPMENT	PER MILE	3
18a25	Vehicle Use-Trailers, Heavy Trucks	EQUIPMENT	PER MILE	6
18a26	Office Trailer	EQUIPMENT	DAY	500
18a27	Hand Tools Per Employee	EQUIPMENT	DAY	75
18a28	Hand Held Radios	EQUIPMENT	DAY	30
18a27	20' Response Trailer	EQUIPMENT	DAY	600
18a28	12K Extended Reach Forklift	EQUIPMENT	HOURLY	150
18a29	20' Response Trailer	EQUIPMENT	DAY	525
18a30	Light Tower	EQUIPMENT	HOURLY	37.50




ITEM NO.	DESCRIPTION	TYPE	UNIT OF MEASURE	RATE
18a31	Small Compressor	EQUIPMENT	DAY	112.50
18a32	Airhose Section	EQUIPMENT	DAY	15
18a33	First Aid Station	EQUIPMENT	DAY	75
18a34	Rain Suit	EQUIPMENT	EACH	45
18a35	PVC Gloves	EQUIPMENT	EACH	15
18a36	Leather Work Gloves	EQUIPMENT	EACH	30
18a37	PVC Boots	EQUIPMENT	EACH	37.50
18b	Bay Cleanup, Red Tide			
18b1	Supervisor with Vehicle	LABOR	HOURLY	75
18b2	Captain	LABOR	HOURLY	93.75
18b3	Deck Hand	LABOR	HOURLY	62.50
18b4	Marine Operator	LABOR	HOURLY	81.25
18b5	Admin Assistant	LABOR	HOURLY	50
18b6	Heavy Equipment Operator	LABOR	HOURLY	68.75
18b7	Tool Operator	LABOR	HOURLY	62.50
18b8	Laborer	LABOR	HOURLY	62.50
18b9	Hazmat Worker	LABOR	HOURLY	68.75
18b10	Mechanic with Truck & Tools	LABOR	HOURLY	100
18b11	< 14' Work Boat	EQUIPMENT	DAY	125
18b12	> 14' Work Boat	EQUIPMENT	DAY	250
18b13	Skimmer Boat	EQUIPMENT	HOURLY	218.75
18b14	Beach Rake with Tractor	EQUIPMENT	HOURLY	93.75
18b15	Boom	EQUIPMENT	PER FOOT/PER DAY	5
18b16	Barge 12x40	EQUIPMENT	HOURLY	250
18b17	Roll Off Dumpsters	EQUIPMENT	DAY	312.50
18b18	Roll Off Truck	EQUIPMENT	HAUL	937.50
18b19	ATV	EQUIPMENT	HOURLY	50
18b20	Loader 2 YD	EQUIPMENT	HOURLY	181.25
18b21	Pickup Truck, 1/2 Ton Unmanned	EQUIPMENT	HOURLY	31.25
18b22	Vehicle Use-Pickup, Van, Car	EQUIPMENT	PER MILE	2.50
18b23	Vehicle Use-Trailers, Heavy Trucks	EQUIPMENT	PER MILE	5
18b24	Office Trailer	EQUIPMENT	DAY	500
18b25	Hand Tools Per Employee	EQUIPMENT	DAY	62.50
18b26	Hand Held Radios	EQUIPMENT	DAY	25
18b27	20' Response Trailer	EQUIPMENT	DAY	500
18b28	12K Extended Reach Forklift	EQUIPMENT	HOURLY	125
18b29	Hydraulic Excavator, 1-5 CY	EQUIPMENT	HOURLY	193.75
18b30	20' Response Trailer	EQUIPMENT	DAY	437.50
18b31	Light Tower	EQUIPMENT	HOURLY	31.25
18b32	Small Compressor	EQUIPMENT	DAY	93.75
18b33	Airhose Section	EQUIPMENT	DAY	12.5
18b34	First Aid Station	EQUIPMENT	DAY	62.50
18b35	Rain Suit	EQUIPMENT	EACH	37.50
18b36	PVC Gloves	EQUIPMENT	EACH	25




ITEM NO.	DESCRIPTION	TYPE	UNIT OF MEASURE	RATE
18b37	Leather Work Gloves	EQUIPMENT	EACH	25
18b38	PVC Boots	EQUIPMENT	EACH	31.25
18c	Intercoastal and Canals, Red Tide			
18c1	Supervisor with Vehicle	LABOR	HOURLY	60
18c2	Captain	LABOR	HOURLY	75
18c3	Deck Hand	LABOR	HOURLY	50
18c4	Marine Operator	LABOR	HOURLY	65
18c5	Admin Assistant	LABOR	HOURLY	40
18c6	Heavy Equipment Operator	LABOR	HOURLY	55
18c7	Tool Operator	LABOR	HOURLY	50
18c8	Laborer	LABOR	HOURLY	50
18c9	Hazmat Worker	LABOR	HOURLY	55
18c10	Mechanic with Truck & Tools	LABOR	HOURLY	80
18c11	< 14' Work Boat	EQUIPMENT	DAY	100
18c12	> 14' Work Boat	EQUIPMENT	DAY	200
18c13	Skimmer Boat	EQUIPMENT	HOURLY	175
18c14	Beach Rake with Tractor	EQUIPMENT	HOURLY	75
18c15	Boom	EQUIPMENT	PER FOOT/PER DAY	4
18c16	Barge 12x40	EQUIPMENT	HOURLY	200
18c17	Roll Off Dumpsters	EQUIPMENT	DAY	250
18c18	Roll Off Truck	EQUIPMENT	HAUL	750
18c19	ATV	EQUIPMENT	HOURLY	40
18c20	Loader 2 YD	EQUIPMENT	HOURLY	145
18c21	Pickup Truck, 1/2 Ton Unmanned	EQUIPMENT	HOURLY	25
18c22	Vehicle Use-Pickup, Van, Car	EQUIPMENT	PER MILE	2
18c23	Vehicle Use-Trailers, Heavy Trucks	EQUIPMENT	PER MILE	4
18c24	Office Trailer	EQUIPMENT	DAY	400
18c25	Hand Tools Per Employee	EQUIPMENT	DAY	50
18c26	Hand Held Radios	EQUIPMENT	DAY	20
18c27	20' Response Trailer	EQUIPMENT	DAY	400
18c28	12K Extended Reach Forklift	EQUIPMENT	HOURLY	100
18c29	Hydraulic Excavator, 1-5 CY	EQUIPMENT	HOURLY	155
18c30	20' Response Trailer	EQUIPMENT	DAY	350
18c31	Light Tower	EQUIPMENT	HOURLY	25
18c32	Small Compressor	EQUIPMENT	DAY	75
18c33	Airhose Section	EQUIPMENT	DAY	10
18c34	First Aid Station	EQUIPMENT	DAY	50
18c35	Rain Suit	EQUIPMENT	EACH	30
18c36	PVC Gloves	EQUIPMENT	EACH	10
18c37	Leather Work Gloves	EQUIPMENT	EACH	20
18c38	PVC Boots	EQUIPMENT	EACH	25

CUSTOM TREE CARE, INC.



Authorized Signature

BOARD OF COUNTY COMMISSIONERS  
HERNANDO COUNTY

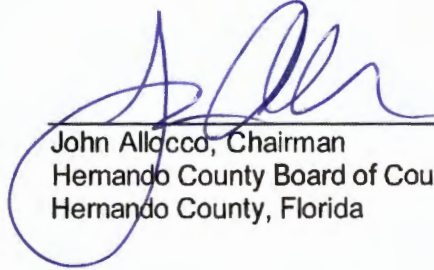

John Allocco, Chairman  
Hernando County Board of County Commissioners  
Hernando County, Florida

Date Issued: 02/21/23

---